

Design of TEM Horn Antenna

Mr.Ashok kumar. L¹, Mr.Navarajan.J² Senthil kumar.D³, Philip samuel.P⁴, Vignesh.S⁵

¹ Assistant Professor, Electronics and communication, Panimalar Institute of technology, Chennai, India

² Assistant Professor, Electronics and communication, Panimalar Institute of technology, Chennai, India

³ Student, Electronics and communication, Panimalar Institute of technology, Chennai, India

⁴ Student, Electronics and communication, Panimalar Institute of technology, Chennai, India

⁵ Student, Electronics and communication, Panimalar Institute of technology, Chennai, India

ABSTRACT

This paper presents a method to improve the pattern characteristics of the TEM horn antenna for 2to14 GHz frequency band. The conventional TEM horn antenna introduces few fluctuations in the main lobe radiation pattern over the higher frequency band, i.e., 10to14 GHz. This was a motivation to propose a new method to remove the aforementioned impact by carving a rounded shape to the open end of exponentially tapered plates. The associated curvature of this arc is to optimize and completely remove the fluctuation. This paper presents the design and optimization of ultra-wideband (UWB) transverse electromagnetic (TEM) horn antennas even capable for ground penetrating radar applications. The numerical simulations of electromagnetic wave propagation are performed and optimized in the time domain for a preliminary and modified TEM horn antenna. The TEM horn antennas have some reactions and ringing in higher frequencies. These reacts are reduced by optimization of the antenna structure. The time domain characteristic, voltage standing wave ratio (VSWR) and gain of the antennas are computed. The measurement results show that the improved TEM horn antenna structure exhibits low VSWR as well as radiation pattern over 2to14 GHz frequency band. The simulations are carried out using CST microwave studio and XFDTD EM simulations software.

Keywords-TEM Horn Antenna, UWB frequency band, Gain, VSWR

1. INTRODUCTION

Wideband antennas have received considerable attention to meet the current demand for a wide variety of applications, including electromagnetic compatibility (EMC) measurement, radar, detection systems, and broad-band communication systems. Bow-tie, log-periodic, spiral and double ridged antenna are some of the well established wideband antennas, which are extensively used for the aforementioned applications [1to6]. Specially, transverse electromagnetic (TEM) horn antennas have been used as wideband antennas for various applications. Typical applications for these antennas include EMC experiments, Ground Penetrating Radar (GPR), Free-space Time-Domain (FTD) measurement systems, and feeds for reflectors [7to12].

This type of antenna has the advantages of wideband, no dispersion, unidirectional and easy construction. Several methods have been introduced to improve the performance of the antenna. In order to reduce the size of the antenna the Cornell Aeronautical Laboratory (CAL) designed a TEM horn with non uniform-line matching from 50 - at the antenna throat to 377 - at the aperture [13]. The non uniform-line matching was achieved by forming the TEM horn plates into empirically determined tear-drop shapes. A small resistance-card termination was placed at the tip of the aperture to provide adequate current attenuation for a traveling wave. With these empirical modifications, the length of the TEM horn was reduced to 0.33, with a reasonable reflection coefficient for the frequency range of 100 MHz to 2 GHz.

One of the most important design goals for the TEM horn antenna is to attain the wide-band characteristics. Kanda [14] introduced the idea of improving the bandwidth by loading the TEM horn antenna with resistors. To reduce the distortion and the reflection at open end, Shlager [15] proposed the antenna with resistive sheet. Since, these antennas used resistive material, they had low efficiency. In [16], an exponentially tapered TEM horn antenna with a microstrip-type balun is proposed to increase the bandwidth and efficiency of the TEM horn antenna. So, the bandwidth of the TEM horn antenna becomes more than three times comparing to that of a linearly tapered TEM horn [12] for the same length. However, one common disadvantage for all these structures was having fluctuation in

the radiation pattern at the higher end of the frequency band [16to19].

In this paper, an exponentially tapered TEM horn antenna with TEM double-ridged transition for the 2to14 GHz frequency band has been designed and manufactured. Although the proposed antenna has the capability to exhibit a low VSWR over a wide band of frequencies, it draws some fluctuations in the main lobe radiation pattern at some parts of the frequency bandwidth. Accordingly, a new method is proposed to compensate the aforementioned impact by carving an arc shape to the open end of exponentially tapered plates. The associated curvature of this arc is optimized to completely remove this fluctuation. The measurement results show that the improved TEM horn antenna structure exhibits low VSWR as well as good radiation pattern over 2to14 GHz frequency band which is useful for automated pattern measurement ranges, eliminating the need for time consuming measurement interruptions normally required to change the source antenna to accommodate different frequency bands. Modified antenna also has significant applications in impulse radar systems, detection of low-observables, and test instrumentations in geological surveys.

In the following section, the design method for the preliminary 2to14 GHz TEM horn is discussed in detail and in the Section 3 the proposed method for modification of the preliminary antenna is presented.

2. DESIGN OF THE PRELIMINARY TEM HORN ANTENNA WITH TEM DOUBLE-RIDGED TRANSITION

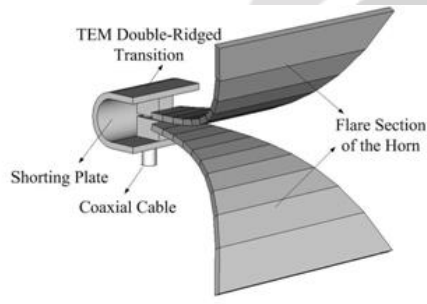


Figure 1. Configuration of the preliminary TEM horn antenna.

2.1 Design of the Horn Section

TEM horn antenna guides a spherical TEM-like mode between its two conductors. To radiate electromagnetic waves into the air, its flare angle, characteristic impedance variation between the two plates, plate length and width must be properly chosen, because these parameters are the most important design factors to achieve the wide-band characteristics of the TEM horn antenna.

The impedance variation of the tapered plates can be linear, exponential, Chebyshev or Hecken [19]. Linear tapered antennas can be built easily as compared to an exponentially tapered antenna. However, exponentially tapered plates have the advantage of smooth impedance variations. This approach reduces reflection coefficient and increases matching bandwidth [16]. A Chebyshev tapered structure improves directivity of the antenna, and yields the smallest minor-lobe amplitude for a fixed taper length [20].

In this paper, we use an exponentially tapered structure. Exponential impedance taper is used to match the characteristic impedance at the feed point to the impedance of the free space at the antenna aperture. In fact, the antenna acts as a transformer to match the transmission line and the free space. The configuration of the horn section is shown in Fig. 2. It is divided into ten sections, each section consists of a parallel plate waveguide.

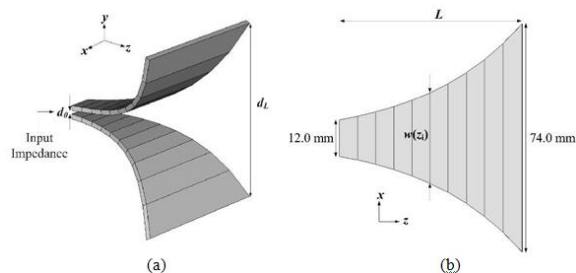


Figure 2. 3D Configuration of the horn section. (a) 3D view. (b) Top view. ($L = 60$ mm, $d_0 = 1.6$ mm, $d_L = 74.0$ mm).

Since the exponentially tapered matching technique is used, the characteristic impedance of each section, $Z(z_i)$, can be expressed as:

$$Z(z_i) = Z_0 \exp(\alpha z_i), \quad z_i = \frac{iL}{N} \quad i = 1, 2, 3, \dots, N; \quad \alpha = \frac{1}{L} \ln \left(\frac{\eta}{Z_0} \right) \quad (1)$$

where Z_0 is the characteristic impedance of the feed line (50 ohm), η is the intrinsic impedance of the free space (120π), L is the antenna length, N is the number of the sections, and α is a constant value to be calculated using the intrinsic impedance of the free space, characteristic impedance of the feed line and the antenna length.

The separation between two parallel plates $d(z_i)$ is determined by an exponential function [16], so it is given by:

$$d(z_i) = a \exp(bz_i) \quad (2)$$

where a and b are constants to be determined using the separation between the plates at input d_0 and output aperture d_L , shown in

$$a = d_0 \quad b = \frac{1}{L} \ln \left(\frac{d_L}{d_0} \right) \quad (3)$$

To determine the plate width of the sections $w(z_i)$, the characteristic impedance of a parallel plate waveguide $Z(z_i)$, given by [21], is used:

$$Z(z_i) = \frac{d(z_i)}{w(z_i)} \eta \quad (4)$$

Design parameters of the horn section are calculated and optimized for 2 to 14 GHz using Eqs. (1) to (4). The length of the horn section is determined as $L = 0.4\lambda$, where λ is the wavelength at the lowest operating frequency and since the lowest operating frequency was selected as 2 GHz, the length of the horn section was determined as 60 mm. The dimensions of each section are shown in Table 1, which exhibits the lower size as compared to other similar antennas for EMC applications.

Table 1. Dimensions of the conventional TEM horn antenna.

Section (i)	z_i (mm)	$Z(z_i)$ (Ohm)	$w(z_i)$ (mm)	$d(z_i)$ (mm)
	0	50.00	12.05	1.60
1	6	61.18	14.45	2.34
2	12	74.88	17.32	3.44
3	18	91.63	20.77	5.04
4	24	112.14	24.91	7.40
5	30	137.24	29.86	10.88
6	36	167.95	35.80	15.96

7	42	205.53	42.93	23.42
8	48	251.53	51.47	34.36
9	54	307.81	61.71	50.42
10	60	376.76	74.00	74.00

2.2 Design of the Feed Section

In order to match the impedance of the horn section to the coaxial line, a TEM double-ridged transition is designed. Fig. 3 shows the calculated input impedance of the designed horn section. In Fig. 3, the real part gives a value around 40 ohm at the frequency band of 9.50 to 14.0 GHz and the imaginary part is close to zero. Since, the calculated input impedance of the TEM horn antenna is about 40 ohm, the TEM double-ridged waveguide is designed for a 40 - characteristic impedance to obtain low levels of VSWR throughout the transformation from the TEM-mode in the coaxial section to the TEM-mode in the parallel plate waveguide.


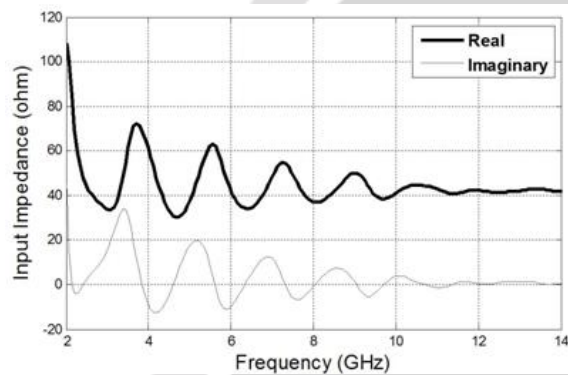


Figure 3. Calculated input impedance of the horn section.

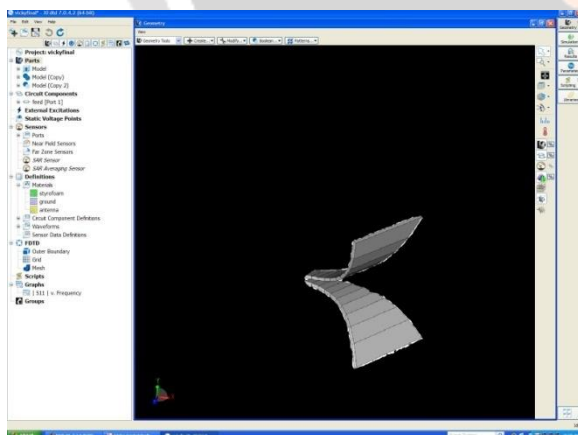

The configuration of the feed section is shown in Fig. 4. As shown, the shield of the coaxial probe is connected to the lower ridge and its inner conductor is connected to the upper ridge by passing a tunnel through the lower ridge. For obtaining a low return loss, the inner conductor of the coaxial probe should be entered very close to the edge of the ridges.

It is very common to use a cavity back to obtain a much lower return loss in the coaxial to double-ridged waveguide transitions. It was found that the VSWR of the antenna is critically dependent on the shape and dimensions of the cavity back. Hence, we consider an elliptical shaped cavity. The cavity dimensions are shown in Fig. 4. Since the cut-off frequency of the cavity is naturally higher than that of its cascaded ridged waveguide, at the

low end of the frequency band the cavity essentially presents an open circuit in parallel with the coaxial probe so that all the energy is essentially directed along the ridged waveguide transmission line toward the antenna. At longer wavelengths, step discontinuities and short transmission line segments have lower order perturbations so that the impedance is almost entirely determined by the double-ridged rectangular waveguide.

As the frequency increases, radiation occurs closer to the cavity, this is because the traveling waves on the exponential TEM transmission line convert to radiating spherical modes sooner. At the higher end of the frequency band, the details of the ridged waveguide cavity become almost completely dominant and therefore control the impedance behavior of the antenna. These considerations lead the designer into an iterative design procedure wherein the low and high ends of the frequency band are matched by modifying the radiating structure and the waveguide cavity.

An experimental antenna is constructed using the results of the simulation, as shown in Fig. 5. The material for the conducting plates is aluminum with 4 mm thickness. The overall length of the antenna is 80 mm and the dimensions of the aperture are 74 mm \times 74 mm. The antenna is fed through a SMA connector. The dimensions of the connector are shown in Fig. 4.

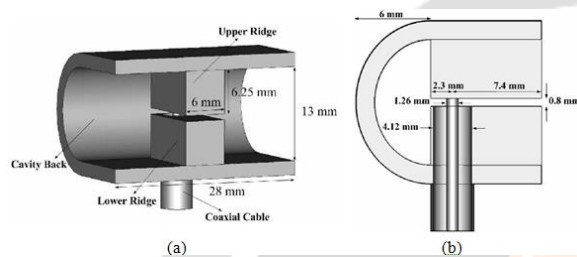


Figure 4. Configuration of the feed section. (a) 3D view. (b) Side view.



Figure 5. Photograph of the manufactured antenna.

Figure 6 shows the measured and simulated VSWR characteristic for the TEM horn antenna, displayed in Fig. 5. The simulated performance was obtained using CST microwave studio simulator [22], and measurements are accomplished using Agilent 8722ES network analyzer. As shown, the measured and simulated VSWRs are similar to each other. The measured results present that the proposed TEM horn antenna has the frequency band of 1.45 to 14.20 GHz for VSWR \leq 2.0.

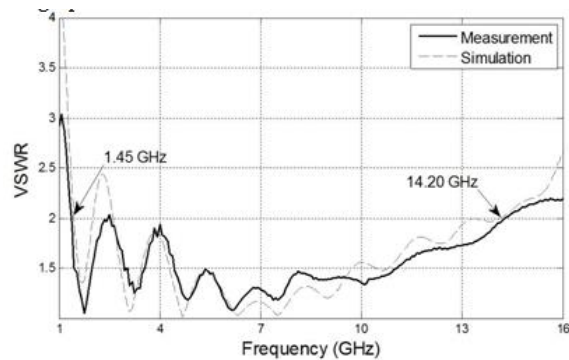


Figure 6. VSWR of the preliminary TEM horn antenna.

The antenna gain and radiation pattern are measured in a fully anechoic chamber. Fig. 7 shows measured E - and H -plane radiation patterns at three different frequencies. As shown, at higher frequencies, there is a fluctuation in radiation pattern; therefore the single main lobe is split into two large side lobes that grow in an equally spaced fashion around the 0^{th} center axis while the main lobe appears to be strongly indented. This can be due to the field distribution over the aperture plane that has a destructive effect in the far field at the broadside direction. The presence of these side lobes is particularly problematic for EMC applications such as testing in an anechoic chamber, which usually depend on a well-defined radiation pattern with only a single main lobe. In the following section, a new method is proposed to remove this drawback. For frequencies below 10 GHz, the radiation pattern looks as expected for a typical horn antenna, i.e., it has one dominant main lobe.

3. MODIFICATION OF THE TEM-HORN ANTENNA




The TEM horn antenna and the modified TEM horn antenna are designed according to the design parameters given in [3]. TEM horn antenna with double-ridged waveguide transition, consists of exponential horn section, TEM double-ridged waveguide, and an elliptical shaped cavity located at the back of the waveguide. Double-ridged waveguide is used for the smooth transition of waves from coaxial cable to the horn section. An elliptical shaped cavity is added to the structure to couple the energy in direction of the horn opening. This antenna is designed in such a way that it provides impedance matching from coaxial cable to the free space.

In [3], the radiation pattern of the TEM horn antenna is analyzed and it has been found that the main lobe is divided into the two side lobes because of the destructive interference at the end of the horn section. By modification of the horn section of the antenna it was possible to mitigate this disadvantage, i.e., by carving the horn section from the end of the two exponentially tapered plates in form of an arc. This changed the field distribution at the horn section and presents a constructive interference on the main axis.

The study of the transient behavior of the antenna is very important for GPR applications. We have simulated the time domain characteristics of the above antennas with an amplitude modulated raised cosine pulse of two cycles (RC2). The pulse has a time duration of 190 ps and is stimulated at a waveguide port which is placed at the end of the coaxial cable. The port is also used for reception and absorption of reflected waves. From the analysis of the time domain simulation, we have found that there are some reflections and ringing coming from different parts of the antenna structure itself. These effects were seen in both antennas at the waveguide port. In order to reduce the prohibited effects, the shape of TEM horn antenna is optimized according to the following steps:

1. Perpendicular plates are placed at the lower ends of the exponential tapered plates. The perpendicular plates have the same height as the ridges of the waveguide.
2. The upper ends of the exponential tapered plates and the perpendicular plates are connected with the another plates.
3. Cover the remaining sides of the exponential tapered plates.
4. Finally, an elliptical cylinder and spheres of radius 5 mm are placed at the upper end of exponential tapered plates to reduce the corner reflects.

5. The corresponding VSWR of the modified TEM horn antenna is shown. The VSWR of the preliminary and modified TEM horn antenna correspond extremely well, the only substantial difference is in the peak value at the 2.5 GHz.
6. Measured radiation patterns for the modified TEM horn antenna are shown. The measured results confirm that the desired field distribution at the antenna aperture is achieved, so there is only one dominant main lobe over the entire frequency band. Also, from this figure it is seen that the back lobe and side lobe levels (SLL) are low. Furthermore as the frequency grows, the pattern becomes more directional.

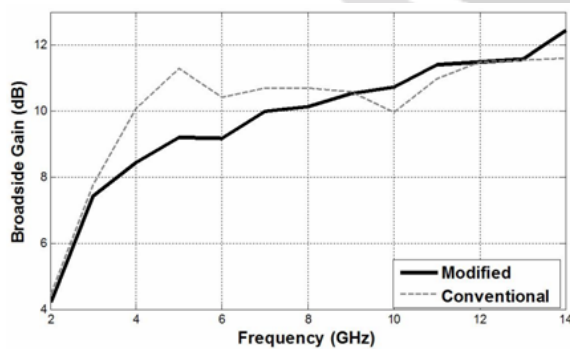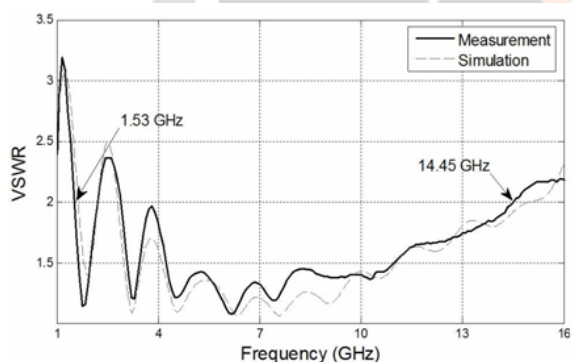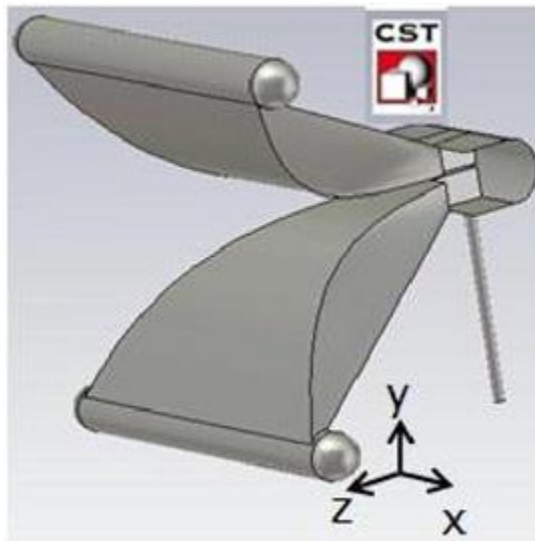

4. CONCLUSION

A modified TEM horn antenna structure is proposed. In spite of the conventional TEM horn antenna which suffers from fluctuations in the radiation pattern's main lobe over some part of frequency band, the proposed antenna is shown to have a smooth shape, as well as low VSWR. To do this, an arc shape is carved from the open end of exponentially tapered plates. The associated curvature of this arc is optimized to completely remove the aforementioned fluctuation. This is done by changing the field distribution at the antenna aperture over the frequency band, wherein this fluctuation appears. The designed antenna has a small size, reduced weight and relatively high gain. As a result, the proposed antenna is well suited for broadband applications such as EMC and space borne applications.

5. REFERENCES

1. Koo, B. W., M. S. Baek, and H. K. Song, "Multiple antenna transmission technique for UWB system," *Progress In Electromagnetics Research Letters*, Vol. 2, 177to185, 2008.
2. Mallahzadeh, A. R., A. A. Dastranj, and H. R. Hassani, "A novel dual-polarized double-ridged horn antenna for wideband applications," *Progress In Electromagnetics Research B*, Vol. 1, 67to80, 2008.
3. Abbas-Azimi, M., F. Arazm, J. Rashed-Mohassel, and R. Faraji-Dana, "Design and optimization of a new 1to18 GHz double ridged guide horn antenna," *Journal of Electromagnetic Waves and Applications*, Vol. 21, No. 4, 501to516, 2007.
4. Joardar, S. and A. B. Bhattacharya, "A novel method for testing ultra wideband antenna-feeds on radio telescope dish antennas," *Progress In Electromagnetics Research*, PIER 81, 41to59, 2008.
5. Atteia, G. E., A. A. Shaalan, and K. A. Hussein, "Wideband partially-covered bowtie antenna for ground-penetrating-radars," *Progress In Electromagnetics Research*, PIER 71, 211to226, 2007.
6. Uduwawala, D., "Modeling and investigation of planar parabolic dipoles for GPR applications: A comparison with bow-tie using FDTD," *Journal of Electromagnetic Waves and Applications*, Vol. 20, No. 2, 227to236, 2006.
7. Kolokotronis, D. A., Y. Huang, and J. T. Zhang, "Design of TEM horn antennas for impulse radar," *IEEE High Frequency Postgraduate Student Colloquium*, 120to126, September 17, 1999.
8. Johnk, R. T., D. R. Novotny, C. M. Weil, M. Taylor, and T. J. Hara, "Efficient and accurate testing of an EMC compliance chamber using an ultra wideband measurement system," *IEEE International Symposium on EMC*, Vol. 1, 302to307, August 2001.
9. Shlager, K. L., G. S. Smith, and J. G. Maloney, "Accurate analysis of TEM horn antennas for pulse radiation," *IEEE Transactions on Antennas and Propagation*, Vol. 38, No. 3, August 1996.
10. Nakhkash, M. and Y. Huang, "Directive wideband TEM horn antenna for precise free-space measurements," *Conference on Precision Electromagnetic Measurements*, 140to141, 2002.
11. Turk, A. S., "Ultra wideband TEM horn design for ground penetrating impulse radar system," *Microwave and Optical Technology Letters*, Vol. 41, No. 5, 333to336, June 2004.
12. Wang, J., C. Tian, G. Luo, Y. Chen, and D. Ge, "Four-element TEM horn array for radiating ultra-wideband electromagnetic pulses," *Microwave and Optical Technology Letters*, Vol. 31, No. 3, 190to194, Nov. 2001.
13. Miller, E. K., *Time-domain Measurements in Electromagnetics*, Springer, 1986.
14. Kanda, M., "The effects of resistive loading of TEM horns," *IEEE Transactions on Electromagnetic Compatibility*, Vol. 24, No. 2, 246to255, May 1982.
15. Shlager, K. L., G. S. Smith, and J. G. Maloney, "TEM horn antenna for pulse radiation: An improved design," *Microwave and Optical Technology Letters*, Vol. 12, No. 2, 86to90, June 1996.
16. XFDTD EM simulation software.
17. Lee, S. and H. Choi, "Design of an exponentially tapered TEM horn antenna for the wide broadband communication," *Microwave and Optical Technology Letters*, Vol. 40, No. 6, 531to 534, March 2004.
18. Malherbe, J. A. G., "Extreme performance TEM horn," *Microwave and Optical Technology Letters*, Vol. 50, No. 8, 2121to 2125, August 2008.
19. Malherbe, J. A. G. and N. Barnes, "TEM horn antenna with an elliptic profile," *Microwave and Optical*

Technology Letters, Vol. 49, No. 7, 1548to1551, July 2007.

20. Bassam, S. and J. Rashed-Mohassel, "A chebyshev tapered TEM horn antenna," *PIRES Online*, Vol. 2, No. 6, 706to709, 2006.
21. Pozar, D. M., *Microwave Engineering*, 2nd edition, John Wiley & Sons Inc., 1998.
22. Microwave Studio User's Manual, Release 2008.03, CST Software, Inc., 2004.

