

# Cognitive Radio Aided Vehicular Ad-Hoc Network with Efficient Spectrum Sensing.

Kriya Bhatt<sup>1</sup>, Prof. Gayatri Pandi (Jain)<sup>2</sup>.

<sup>1</sup>Student (Master of Engineering), Information Technology, L.J. Institute of Engineering and Technology, Gujarat, India.

<sup>2</sup>H.O.D.PG Departments, Computer Engineering, L.J. Institute of Engineering and Technology, Gujarat, India.

## ABSTRACT

VANET is vehicular Ad-hoc network which is used for intelligent transport system for the drivers. The ad-hoc network is used to transmit various types of message over the network. Cognitive Radio Network obtains knowledge of its operational geographical environment to manage sharing of spectrum between primary and secondary users, while VANET shares emergency safety messages among vehicles to ensure safety of users on the road. Cognitive radio network is employed in VANET to ensure the efficient use of spectrum, as well as to support VANET's deployment. Random increase and decrease of spectrum users, unpredictable nature of VANET, high mobility, varying interference, security, packet scheduling, and priority assignment are the challenges encountered in a typical Cognitive VANET environment. The proposed model has two distinct information exchange system layouts. One is dynamic (vehicle to vehicle) and another is semi-dynamic (vehicle to Road-Side- Unit). For the vehicle-2-vehicle communication, the proposed model assumes that vehicles can communicate with each other using available wireless resources. In this paper with the help of cognitive radio mechanism, we discuss the problem that occurs when communication through high road density is higher due to high load on road, message communication get overhead due to less amount of network bandwidth to overcome this issue Cognitive Radio bandwidth is utilized for data transmission by channel sensing and messages are transmitted through Cognitive Radio channels.

**Keyword:** - Vehicular Ad Hoc Network (VANET), Cognitive Radio (CR), CR-VANET's, Spectrum Sensing, Vehicle to Vehicle Communication, Vehicle to Infrastructure Communication

## 1. INTRODUCTION

Vehicular Ad Hoc Network is a technology that uses moving cars as a nodes in a network to create a mobile network. In turn to create a network with a wide range, it turns every participating cars into a wireless router or node, allowing cars approximate of 100 to 300 m of each other to connect. It has mainly two types of communication they are Vehicle to Vehicle (V2V) and Vehicle to Infrastructure (V2I). We need VANET because of safety purpose, for example police and fire vehicles to communicate with each other. Communication between V2I and V2V are "Ad Hoc" in nature. The vehicles communicate with the road side units with the help of onboard units<sup>[5]</sup>. VANET's are vehicular Ad Hoc networks where vehicles are transmitting nodes. The radio channels through which these nodes send messages are valuable resources. Hence to facilitate equal sharing cognitive radio is used. VANET's are used for a wide variety of applications which include dissemination of emergency messages during natural disasters/accidents, platooning, information on traffic and information on routes<sup>[5]</sup>. The performance of VANET depends on the efficiency of Dedicated Short Range Communication (DSRC). This type of communication facilitates a wide variety of applications like V-V safety messages, information on traffic and toll collection<sup>[5]</sup>.

Cognitive Radio (CR) is a form of wireless communication in which transceiver can intelligently detect which communication channels are in use and which are not, and instantly move into vacant channels while avoiding occupied ones. Cognitive radio can effectively use the frequencies to extract maximum bandwidth. It is capable of providing bandwidth solution to both licensed users, that is, to users who have a license to use the spectrum and to those users who don't have a license<sup>[5]</sup>. DSRC has been standardized and the channels are reserved for automobile

communications only. But, unfortunately these channels suffer from scarcity of available spectrum due to increasing demands of vehicular applications. Researches have introduced cognitive radio technology into VANET to form the CR-VANET where cognitive radio seems to be a promising technology to resolve the issue of spectrum scarcity in VANET's <sup>[2]</sup>. The CR allows vehicles to opportunistically sense the spectrum and utilizes spectrum holes in the licensed spectrum without interfering the primary users <sup>[2][3]</sup>.

## 2. ARCHITECTURE OF VANET

The Architecture of the VANET comprising of many individual things like vehicle fitted with transceivers and on board application, Road Side Units (RSU), centralized management system, communication links and many more. On-Board Unit (OBU) is a device which is fitted inside the vehicle (responsible for communication with outside network) which is with other vehicle or infrastructure. Road side unit is an infrastructure for communication between cars for sharing information from various vehicles <sup>[7]</sup>. The system can be divided into three domains they are Mobile domain, Infrastructure domain and Management domain <sup>[8]</sup>.

The Mobile domain consists of two parts: the vehicle domain and the mobile device domain. The vehicle domain comprises all kinds of vehicles such as cars and buses whereas the mobile device comprises all kinds of portable devices like personal navigation devices and smartphones <sup>[7]</sup>.

In the Infrastructure domain have two sub domains: roadside infrastructure domain and the central infrastructure domain. The roadside infrastructure domain contains roadside units like traffic lights. The central infrastructure domain contains infrastructure management centers such as traffic management centers (TMCs) and vehicle management centers <sup>[7]</sup>.

The Management domain consists of the management systems like the servers and surveillance applications. Whenever a message comes to the server about any accident or traffic slow down problem, the server send alert message back to other in coming vehicle in the range. This information is very useful for the vehicle to tackle the situations <sup>[8]</sup>.

As shown in Figure 1 the in-vehicle domain is composed of an On-Board unit (OBU) and one or multiple Application Units (AUs). The ad hoc domain is composed of vehicles equipped with OBUs and roadside units (RSUs). An OBU can be seen as a mobile node of an ad-hoc network and RSU is a static node likewise. An RSU can be connected to the Internet via the gateway; RSUs can communicate with each other directly or via multi-hop as well. There are two types of infrastructure domain access, RSUs and Hot Spots (HSs). OBUs may communicate with Internet via RSUs or HSs. In the absence of RSUs and HSs, OBUs can also communicate with each other by using cellular radio networks (GSM, GPRS, UMTS, WiMAX, and 4G) <sup>[7]</sup>.

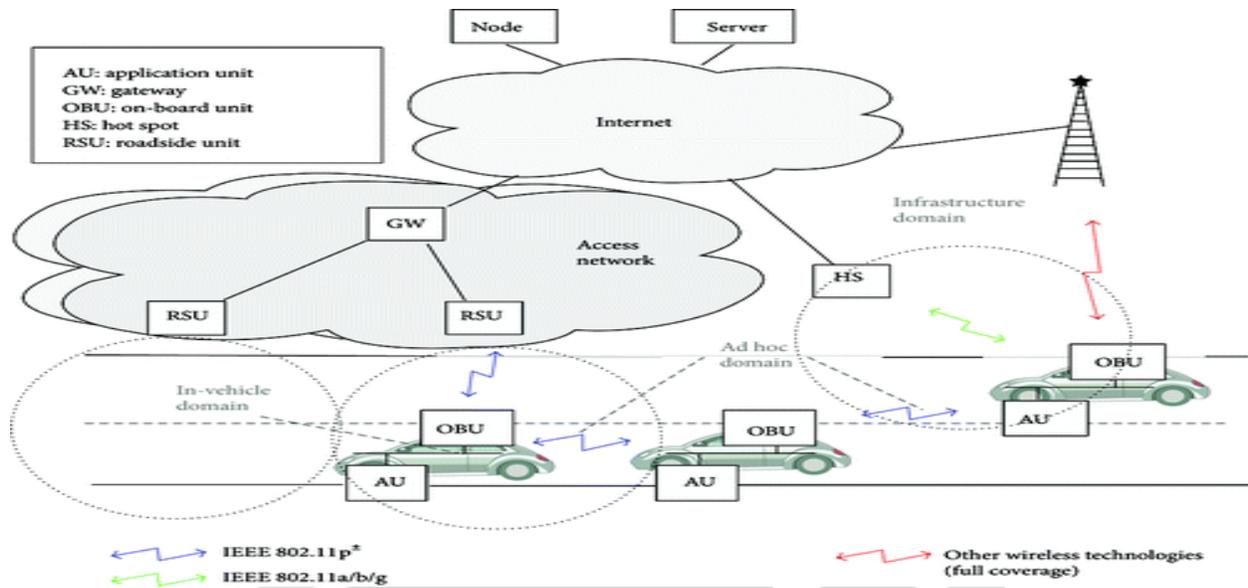


Figure 1: C2C-CC reference architecture [7].

Communication types in VANETs can be categorized into four types. The category is closely related to VANETs components as described below. Figure 2 describes the key functions of each communication type [8].

*In-vehicle communication:* The system can detect a vehicle’s performance and especially driver’s fatigue and drowsiness, which is critical for driver and public safety [8].

*Vehicle-to-Vehicle (V2V) communication:* It can provide a data exchange platform for the drivers to share information and warning messages, so as to expand driver assistance [8]. It allows direct vehicular communication without relying on a fixed infrastructure support and is mainly employed for safety, security and dissemination applications [10].

*Vehicle-to-Road Infrastructure (V2I) communication:* It enables real-time traffic/weather updates for drivers and provides environmental sensing and monitoring [8]. It also allows a vehicle to communicate with the roadside infrastructure mainly for information and data gathering applications [10].

*Vehicle-to-Broadband Cloud (V2B) communication:* Vehicles may communicate via wireless broadband mechanisms such as 3G/4G. As the broadband cloud may include more traffic information and monitoring data as well as infotainment, this type of communication will be useful for active driver assistance and vehicle tracking [8].

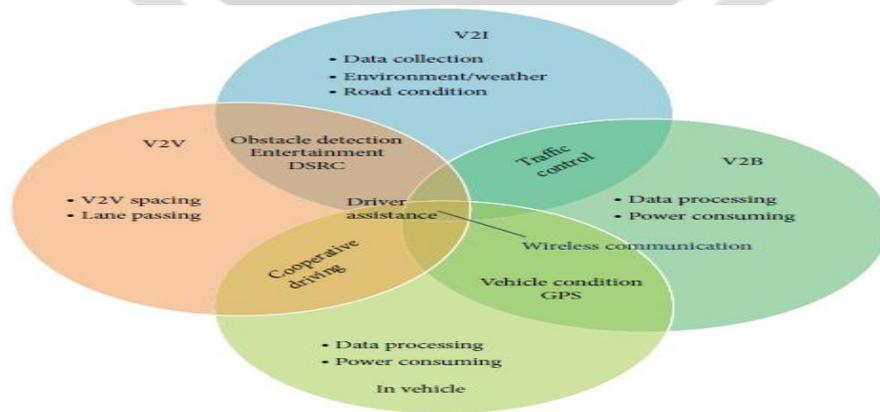


Figure 2: Key functions of each communication type [7].

### **3. RELATED WORKS**

#### **3.1 LITERATURE REVIEW**

##### **3.1.1 Cognitive Radio Aided Vehicular Ad-Hoc Networks with Efficient Spectrum Allocation and QoS Guarantee**

In [1] Joy Eze C, Sijing Zhang, Enjie Liu, Theresa Efor E, Elias Eze C, A novel Adaptive CR Enabled Vehicular Network (ACREVNET) framework is proposed to resolve the shortage of spectral resource challenge for vehicular networks created by the increasing demand of diverse vehicular network oriented applications. They also proposed a CR Adaptive Spectrum Sensing (CRASS) scheme capable of reducing the spectrum sensing cost and improving sensing performance. Finally they proposed a Generalized Non-Symmetric Nash Bargaining Solution (GNNBS) to perform a non-symmetric cognitive inter-cell spectrum allocation in ACREVNET.

##### **3.1.2 Spectrum and Connectivity Aware Anchor-based Routing in Cognitive Vehicular Ad Hoc Networks**

In [2] Huma Ghafoor and Insoo Koo, In this paper, they have proposed a novel routing protocol for vehicular ad hoc networks in urban scenario. Cognitive V2V communication in which decision is taken at the anchor point by estimating channel condition in future segments and vehicle density on each street. The vehicle density is calculated by the messages received from all the neighbours in the source/anchor's vehicular transmission range.

##### **3.1.3 Transmission Opportunity of Spectrum Sharing with Cellular Uplink Spectrum in Cognitive VANET**

In [3] Hang Zhang, Xinxin He, Tao Luo and Weisen Shi, A Cellular Cognitive Radio Vehicular Ad Hoc Network (CCR - VANET) system consisting of a bus Wi-Fi cellular network and a VANET with cognitive-CSMA protocol, they derive the transmission opportunity of secondary network. The transmission opportunity increasing of maximum received beacon power threshold, predefined carrier sensing threshold and the number of sub-channels, while decreases with the increasing of the density of active primary transmitters.

##### **3.1.4 History-based spectrum sensing in CR-VANETs**

In [4] Shahid H Abbassi, Ijaz M Qureshi, Hameer Abbasi and Bahman R Alyaie, In this paper they have proposed a sensing technique which prepares a database for small road segments, time slots for the hours of the day, and different frequencies of the spectrum based on the sensing of vehicles throughout the day. A historic data of sensing the CR spectrum, so it provides a clear picture of spatio-temporal and frequency slots for its future activity. It observes the primary user's activity and timing related to acquiring and leaving the channel for a particular distance slot and frequency. Based on these computations and observations, a list is prepared giving priority to the channels which are most likely to be available for the duration of the intended transmission.

##### **3.1.5 Performance Analysis of Spectrum sensing Techniques in Cognitive Radio based Vehicular Ad Hoc Networks (VANET).**

In [5] Usha.M, Dr.B.Ramakrishnan, J.Sathiamoorthy, Analyzed the performance of three essential spectrum sensing techniques, namely, cooperative spectrum sensing, distributive spectrum sensing and fuzzy distributed spectrum sensing. They have compared these spectrum sensing techniques to determine their efficiency to locate free channels, speed and mode of operation. By analyzing these three techniques they have found that fuzzy distributed spectrum sensing is better than the earlier techniques proposed in spectrum sensing.

### 3.3 COMPARATIVE TABLE

**Table -1:** Comparative Table

SR.NO.	PAPER TITLE	METHOD USED	ADVANTAGE	DISADVANTAGE
1	Cognitive Radio Aided Vehicular Ad-Hoc Networks with Efficient Spectrum Allocation and QoS Guarantee	ACREVNET	To resolve shortage of spectral resource challenge for V2V communication networks, ACREVNET is used.	Transmission blocking probability for safety message is lesser compared to non-safety message
2	Spectrum and Connectivity Aware Anchor-based Routing in Cognitive Vehicular Ad Hoc Networks	spectrum and connectivity aware anchor-based routing protocol	It shows improvement in packet delivery ratio in comparison with existing protocol.	Protocol performs well in highway scenario may degrades its performance in urban scenario.
3	Transmission Opportunity of Spectrum Sharing with Cellular Uplink Spectrum in Cognitive VANET	Cellular Cognitive Radio Vehicular ad hoc network, Car-Following Model	The two coexisting networks share the uplink spectrum of cellular network.	The transmission opportunity is affected by several factors.
4	History-based spectrum sensing in CR-VANETs	DSRC, RSU's, spectrum sensing technique	It provides a clear picture of spatio-temporal and frequency slots for future activity.	It doesn't have allocation of the spectrum to secondary users
5	Performance Analysis of Spectrum sensing Techniques in Cognitive Radio based Vehicular Ad Hoc Networks	Cognitive Radio, Cooperative Spectrum Sensing Distributive Spectrum Sensing, Fuzzy Distributed Spectrum Sensing	Fuzzy distributed spectrum sensing is better than other techniques.	In case any malicious nodes are present DSS & CSS techniques will suffer a far worse delay than the delay experienced during normal network conditions.

### 4. PROPOSED MODEL

In order to get efficient result for communication in VANET with the help of cognitive radio technology we can improve sensing performance, reduce the spectrum sensing cost and message transmission delay. To achieve that following basic steps are required and described as follows:

**Step 1:** A VANET environment is generated where an urban scenario is been created, the communication occurs between vehicle to vehicle or vehicle to infrastructure occurs.

**Step 2:** An Ad-Hoc scheme is created where VANET turns every participating vehicle into a wireless router or node, allowing vehicles to connect with each other in a range of approximately 100 to 300 meters and in turn they create a wide range of network.

**Step 3:** Some of the basic parameters are set like directions of the road, speed of the vehicle, velocity and change in speed and direction.

**Step 4:** Now we will also create a cognitive radio network environment, with the help of CR we can detect the availability of channels in a wireless spectrum and also changes the transmission parameters which enables more communications to run concurrently.

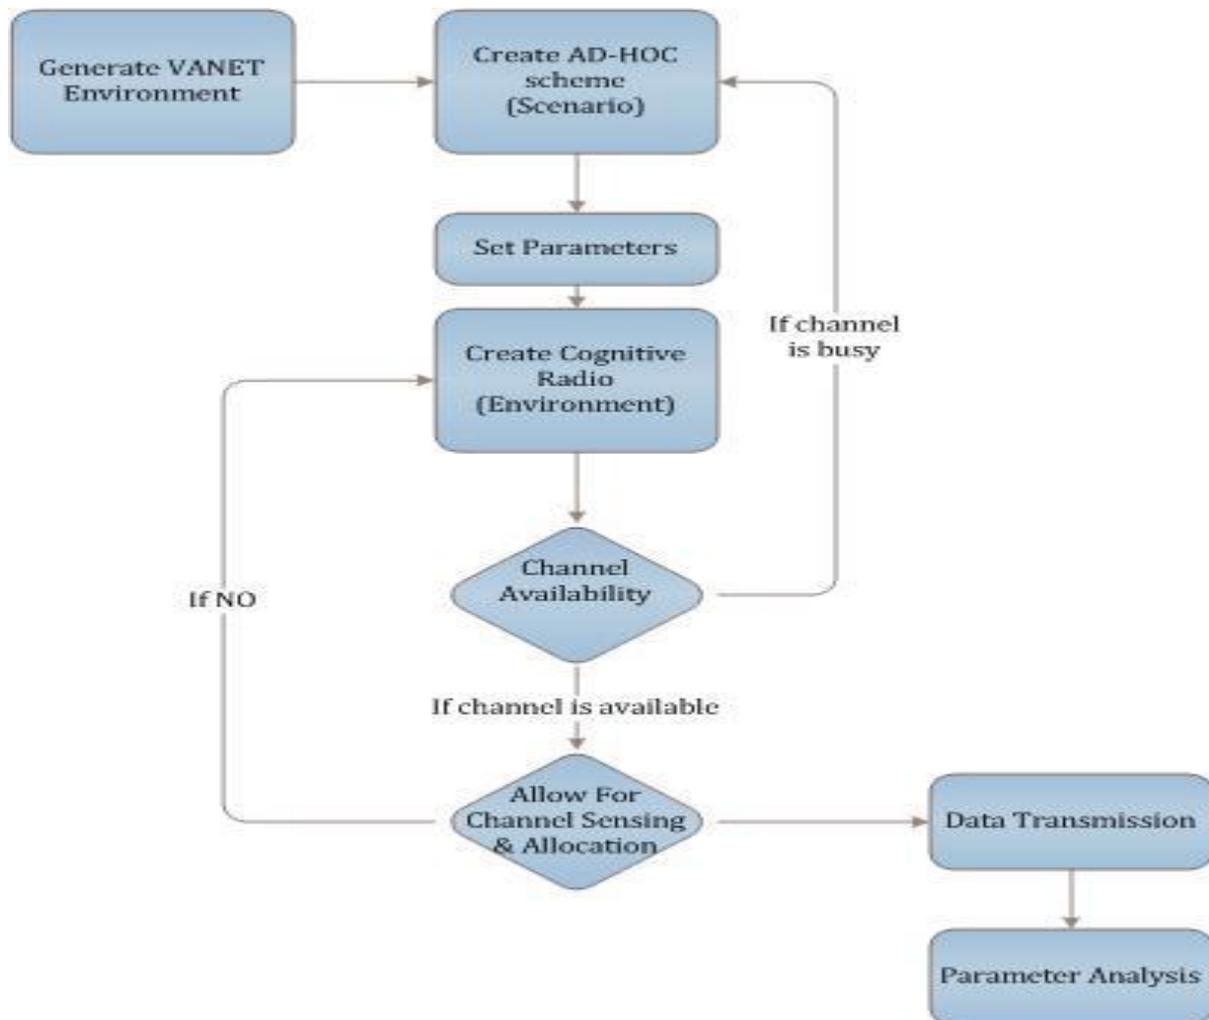


Figure 3: CR-VANET Proposed Model

**Step 5:** If the channel is available for the nodes it will allow the nodes for spectrum sensing but if channel is busy then node has to wait for a period of time until channel gets available.

**Step 6:** After the allocation of channel to the node is done the data transmission occurs.

**Step 7:** The Analysis of parameters is carried out in this stage where parameters are throughput, latency, efficiency, packet delivery ratio.

## 5. CONCLUSION

Several highlighted problems such as coordination between licensed and unlicensed users, duration of spectrum opportunities, multiple points of observation, interference, delay, and security are the main concerns in cognitive radio VANET. The communication through high road density is due to high load on road, message communication get overhead due to less amount of network bandwidth to overcome this issue Cognitive Radio bandwidth is utilized for data transmission by channel sensing and messages are transmitted through Cognitive Radio channels. In this paper we have proposed a system which helps in improving the efficiency of the data transmission by using cognitive radio which also helps in improving network efficiency i.e. it reduces the dead node ratio, it also allows node query in waiting mode if needed

## 6. REFERENCES

1. Joy Eze C, Sijing Zhang, Enjie Liu, Theresa Efor E, Elias Eze C, "Cognitive Radio Aided Vehicular Ad-Hoc Networks with Efficient Spectrum Allocation and QoS Guarantee", Proceedings of the 22nd IEEE International Conference on Automation & Computing, University of Essex, Colchester, UK, 7-8 September 2016 DOI: 10.1109/IconAC.2016.7604911
2. Huma Ghafoor and Insoo Koo, "Spectrum and Connectivity Aware Anchor-based Routing in Cognitive Vehicular Ad Hoc Networks", Proceedings of the 22nd IEEE International Conference on Automation & Computing, University of Essex, Colchester, UK, 7-8 September 2016, PP 679-684.
3. Hang Zhang, Xinxin He, Tao Luo and Weisen Shi, "Transmission Opportunity of Spectrum Sharing with Cellular Uplink Spectrum in Cognitive VANET", 978-1-5090-1701-0/16 ©2016 IEEE
4. Shahid H Abbassi, Ijaz M Qureshi, Hameer Abbasi and Bahman R Alyaie "History-based spectrum sensing in CR-VANETs", Abbassi et al. EURASIP Journal on Wireless Communications and Networking (2015) 2015:163 DOI 10.1186/s13638-015-0404-4
5. Usha.M, Dr.B.Ramakrishnan, J.Sathiamoorthy, "Performance Analysis of Spectrum sensing Techniques in Cognitive Radio based Vehicular Ad Hoc Networks (VANET).", 978-1-5090-6221-8/17\_c 2017 IEEE, PP 74-80.
6. Shahid H. Abbassi, I. M. Qureshi, Bahman R. Alyaci, HameerAbbasi, Kiran Sultan, "An Efficient Spectrum Sensing Mechanism for CR-VANETs", TextRoad Publication, PP 365-378, 2013
7. Wenshuang Liang, Zhuorong Li, Hongyang Zhang, Shenling Wang, and Rongfang Bie, "Vehicular Ad Hoc Networks: Architectures, Research Issues, Methodologies, Challenges, and Trends", Hindawi Publishing Corporation, PP 1-11, 2015
8. B.Ayyappan, Dr.P.Mohan kumar, "Vehicular Ad Hoc Networks (VANET): Architectures, Methodologies And Design Issues", IEEE, PP 177-180, 2016
9. Ahmed A. Ahmed, Ala Abu Alkheir, Dhaou Said, and Hussein T. Mouftah, "Cooperative Spectrum Sensing for Cognitive Radio Vehicular Ad Hoc Networks:An Overview and Open Research Issues", 2016 IEEE Canadian Conference on Electrical and Computer Engineering (CCECE), 978-1-4673-8721-7/16©2016 IEEE
10. Riddhi Gajjar, Gayatri Pandi, "Survey on Data Dissemination in VANET for improving Reliability", JARIE-ISSN(O)-2395-4396, Vol-2 Issue-6 2016, PP 680-683