

# EFFECT ON PROCESS PARAMETER OF FDM MACHINE USING MADM METHOD

Kinjal K Patel<sup>1</sup>, Asst. Prof. Chintan R. Prajapati<sup>2</sup>, Asst. Prof. Priyank B. Patel<sup>3</sup>

<sup>1</sup> M.E. Advance Manufacturing System , Aadishwar College of Technology-, Ghandhinger, Gujrat, India

<sup>2</sup> Asst. Prof. Department of Mechanical Engineering Aadishwar College of Technology- Gandhinagar,,Gujrat,India

<sup>3</sup> Asst. Prof. Department of Mechanical Engineering ,Merchant Polytechnic College, Basna, Gujrat,India

## ABSTRACT

There are several different methods of 3D printing, but the most widely used is a process known as Fused Deposition Modeling (FDM). FDM printers use a thermoplastic filament, which is heated to its melting point and then extruded, layer by layer, to create a three dimensional object .Fused deposition modeling (FDM) is a fast growing rapid prototyping (RP) technology due to its ability to build functional parts having complex geometrical shapes in reasonable build time. The dimensional accuracy, surface roughness, mechanical strength and above all functionality of built parts are dependent on many process variables and their settings. Rapid Prototyping (RP) technology has been advanced to fabricate initial prototypes from various materials. Stratasys Fused Deposition Modeling (FDM)is one of the typical RP processes that provide functional prototypes of PLA, ABS, nylon, wax etc plastic material. Rapid prototyping technologies for easy production of prototypes, parts and tools are new methods which are developing unbelievably quickly. Successful product development means developing a product of high quality, at lowest cost, in the shortest time, in at a reasonable price. The development of the part and its introduction to market is time consumption process. But 'time is Money' and therefore could be said that money saving is greatest when time to market is minimalized utmost. Experimentation was planned as per taguchi's L9 orthogonal array .In this techniques are using such as, multi objective optimization on the basis of ratio analysis(MOORA),Analytical hierachy process(AHP) method for optimization of fused deposition modeling(FDM)

**Keyword :** - Fused Deposition Modeling(FDM), Layer Thickness, Orientation , Infill, Preference selection Method (PSI).

## 1. INTRODUCTION

### 1.1 History of Rapid Prototyping

In 1987 the manufacturing industry was introduce to an emerging new technology called rapid prototype (RP) at the AUTOFACT shown in Detroit. At that time it was referred to as stereo-lithography and the prototype was produced by curing photosensitive polymers with an ultraviolet laser. After that, several further forms of rapid prototyping technology have been introducing the marketplace. Rapid prototyping is a useful technology in which a model uses CAD is taken as input and then layer by layer construction a solid part similar to the model be able to. It helps to use

for study in development of different components of a system. It has minimum production risks and it is a time saving process in case of complex design. In the behind sixties Herbert Voelcker, an engineering professor thinking about computer controlled automatic machine tool. He was trying to discover a technique to control the automatic machine tools using a program in the computer. Carl Deckard proposed the layer based manufacturing method in 1987. His thoughts of structure a model layer through layer. He used a laser beam to fuse the metal powder to form a solid model, creation only one layer at a moment. That method is developed into Selective Laser Sintering. Voelcker helpful finding, inventive thoughts and research has specified to new approaches to the rapid prototyping manufacturing. The rapid prototyping technique has developed and revolutionize. Though there are many people who have done significant work in the field of the RP, Charles Hull's model of apparatus for manufacture of three dimensional objects by Stereo lithography has been predictable the most. He is known as the father of Rapid Prototyping.

Today a design in any CAD software can be prototype without much hard work and it has made manufacturing not only simple and quick but also charges effectual.

## 1.2 Fused Deposition Modeling (FDM)

Fused deposition modeling, which is often referred to by its initials FDM, is a type of additive fabrication or (sometimes called rapid prototyping/rapid manufacturing (RP or RM)) technology commonly used within engineering design. Scott Crump was develop the FDM technology in the late 1980s and was commercialized in 1990. The FDM technology is marketed commercially by Stratasys. FDM works on an "additive" principle by laying down material in layers. A plastic filament or wire is unwound from a material spool (coil) and supplies material to the extrusion nozzle and which can turn on and off the flow.

The nozzle is heated to melt the material and can be moved in both horizontal and vertical directions by a numerically controlled mechanism, directly controlled by a CAM software package. The part or object is produced by extruding small beads of thermoplastic such as ABS, PLA, PC, NAYLON material to form layers as the material hardens immediately after extrusion from the nozzle.

A "water-soluble" material like High impact polystyrene (HIPS) can be used for supports material while manufacturing is in progress. HIPS support material is quickly dissolved with specialized mechanical agitation equipment utilizing a precisely heated sodium hydroxide solution.

### 1.2.1 FDM Process

The FDM process itself consists of building the model layers by depositing a thin filament of melted plastic via a precisely calibrated orifice mounted on a computer controlled XY movement. The width of the deposited plastic line is fine, so the mass of the model is built up in many successive passes. The model is created on a base which is also computer controlled to index downward one layer thickness as each layer is completed. Each successive layer fuses to the preceding layer as the thermoplastic material is dispensed in a hot, semi-liquid state, then cools down and solidifies. The resolution and precision of the FDM process varies with the machine and the type of material employed. The finest that can be had currently is a layer thickness of about 0.125mm, but typical layer thickness is twice that. Line width of each pass is twice the layer thickness. Precision is around +/- 0.1mm for smaller parts. The materials that can be employed are all thermoplastics, a number of other plastics are also available. To allow hollow sections and overhanging parts, the process automatically generates supports. These can either be special "break-away" style supports of the same material as the model, or in some cases, supports of another material. Newest technology allows the support material to be "water soluble", allowing relatively easy removal (never the lesser requiring a heated ultrasonic tank, a mild chemical solution and some time). It is also possible to create structures with a solid skin and a honeycomb interior, resulting in a lighter part with less material use.

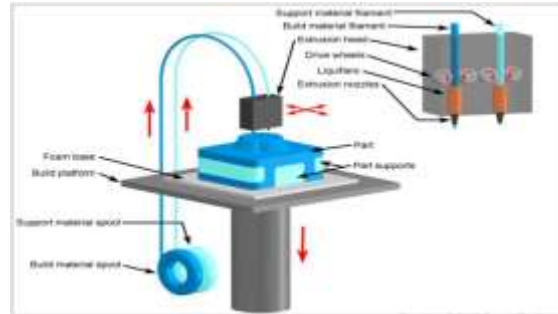


Figure 1.8: Fused Deposition Modeling (FDM)

## 2. LITERATURE REVIEW

**Vinod G. Surange, Punit V Ghara et al. [1]** have to develop a low cost 3D Printer by using materials which are easily available and cost effective. We have been successful in reducing the cost to a considerable extent i.e about 10-15 %. The parts made in 3D design software are successfully imported in the printing software and the product obtained has the same dimension given during the design stage of the product i.e an accuracy close to 100%. We were able to successfully fabricate the 3D printer according to its virtual design proposed at reduced cost.

**Miguel Fernandez-Vicente, Wilson Calle,2 Santiago Ferrandiz, and Andres Conejero et al. [2]** to investigate the significant effects of infill density and pattern on mechanical properties of the desktop FFF 3Dprinting process have been experimentally studied. Practical findings in the 3D printing process showed that, The combination of rectilinear pattern in a 100% infill shows the highest tensile strength, with a value of 36.4Mpa, a difference of less than 1% from that of raw ABS material, Under the same density, the honeycomb pattern shows a better tensile strength, although the difference between the different patterns is less than 5%. This discrepancy could be attributed to small variations of amount of plastic deposited for each pattern, The deposition trajectories and consequently the inter layer bonding zones are very different between honeycomb and rectilinear patterns. This could be a reason to explain the elastic modulus difference .However, more research on this topic needs to be under taken before this association could be more clearly understood, The change in the infill density determines mainly the tensile strength, and the stiffness, especially between 20% and 50%.C The mechanical behavior between the different so structure similar, and the dispersion between the samples is below 10%.C The relationship between infill density and tensile strength can be fitted in a squared-X model. Further studies are needed to understand the crystal volume fraction of the samples as previous studies developed on PLA, as it was observed, a strong relationship between this characteristic and the tensile strength.37The scarcity of studies in literature about the influence of me so structure, as well as other factors, such as environment ,reveal a need for further research into the mechanical behavior of the 3D printed pieces.

**Nectaros Vidakis,Achilles et al. [3]** has performed tensile strength of parts build with FDM was measured. Parts were tested in tension and results were compared to the nominal ABS filament strength. The aim of this work was to determine the actual mechanical strength of 3d printed parts, and provide this valuable information to designers .The machines employed automate the 3d printing of parts, providing an easy-to-set-up process, but without an ability to adjust build parameters, such as the layers fill pattern, which does affect the strength of the build parts. The parameters that can be selected in the machines used were chosen from a wide range and results verified the anisotropic behaviour of the build parts. This observation identifies the build direction as a critical parameter for the determination of the mechanical properties of the finished parts.As expected, the tensile strength of the 3d printed specimens is lower than the nominal filament strength for both materials. The ABS results were closer to the nominal values, while the ABS plus showed larger deviation from the nominal filament tensile strength. In order to accurately design load bearing parts with the 3d printing process, these differences between the maximum tensile strength for the 3d printed specimens and the nominal filament material should be taken into account.

**NAJIM A. Saad, Ahmed Sabah et al. [4]** have studied the light weight structure of (ABS/PLA) consist of honey comb core with skin layers as sandwich structure, the design includes design of the core with increasing the infill percentage of (10%, 30%, 50%, 70%, 90% and 100%) by increasing of hexagonal pores volume to test tensile strength, also includes the different between the heat and adhesive joining to prepare the sandwich structure panels for stiffness test. The samples are prepared by 3D Printing technique, type fused deposition modeling. FDM and the (3D desktop printer) type of printing machine is used to conduct this work. Different mechanical and physical



properties (tensile strength, stiffness, specific strength, etc.) are tested. The results show improvement of, specific strength. Tensile strength and modulus with increasing of pore size (hexagonal) reduction for tensile test samples, heat joining gives lower stiffness than adhesive joining of flexural strength test.

**Garrett W Melenka, Jonathon S. Schofield, Michael R. Dawson, Jason P. Carey et al. [5]** the common process parameters and understand the impact on the mechanical properties of specimens in PLA. The second order response surface model was used to derive the required relationship among process parameters and the tensile strength. The analysis of the experimental results made it possible to understand the impact of control factors on the mechanical properties of specimens produced using the Rep – Rap method. With regard to UTS values, it is possible to observe a decrease in strength as the infill orientation approaches 90° degrees and an increase as the perimeters increase. An initial increase is evident as the layer thickness approaches 0.18 mm. Beyond this value, a reduction in strength values occurs. An interesting effect is related to the layer thickness, since the strain value reaches its maximum at 0.15 mm and decreases as it approaches 0.2 mm. Considering the combined effects, further correlations were observed between UTS and when results were grouped with the infill orientation and the number of perimeters. The reliability of the statistical model was validated by comparing the predicted maximum UTS value with that established experimentally for a given parameter set. The lack of data in literature and the high variability in experimental results, as well as the effects of other factors, such as micro and macro-geometrical variability, humidity and temperature suggest that further investigations are needed in order to improve the knowledge about the mechanical behaviour of printed components using PLA. The experimental results can be translated into practical suggestions for the settings of process parameters with a view to improve the performance of 3D printers in relation to mechanical properties. The methodology utilised in this study can be applied for future analyses on other low cost 3D printers.

**Todd Letcher et al. [6]** has performed PLA filament and PLA printed specimen mechanical properties were tested. For tensile testing, it was determined that the the 45° raster orientation specimens were the strongest. In fatigue testing, the 90° specimens were clearly the least resistant to fatigue loadings. The fatigue lives for the 45° specimens and 0° specimens were very similar and should be investigated further. However, the 45° specimens did have the highest fatigue endurance limit. The filament testing (at higher strain rates where creep wasn't a factor) showed similar results to the printed specimen results. This may help to determine whether failed print jobs can be recycled into new filament to be printed again. Microscope evaluations helped to determine gap sizes left in the specimens from the printing process.

**Tymrak et al [7]** have studied quantifies the basic tensile strength and elastic modulus of printed components using realistic environmental conditions for standard users of a selection of open-source 3-D printers. They found that the average tensile strength of Rep Rap printed parts is 28.5 MPa for ABS and 56.6 MPa for PLA with average elastic modulus of 1807 MPa for ABS and 3368 MPa for PLA. Results indicate that the 3D printed components from RepRaps are comparable in tensile strength and elastic modulus to the parts printed on commercial 3-D printing systems. There for PLA is the higher flexible compare ABS material.

**Rayegani et al. [8]** investigated found that both process parameters affect tensile strength. Shown that a negative air gap and smaller raster widths also improve tensile strength. The zero part orientation maximum tensile strength is obtained and increased raster angle also improves tensile strength. The optimum parameter formaximum tensile strength is part orientation is zero, raster angle 50°, raster width 0.2034and negative air gap -0.0025.

**Raut et al. [9]** objective of the present study was to investigate the effect of the built up orientation on the mechanical properties and total cost of the FDM parts. It can be concluded that the experimental investigation that built orientation has significant affect on the flexural and tensile and total cost of the parts. Based on these results they concluded that minimal cost of part and optimal tensile strength gives in FDM about y axis at 0% built up orientation. Good flexural strength and medium cost gives about x axis0% built up orientation.

**Patel et al. [10]** has performed the experiment to access the influence of three FDM parameters on the mechanical strength of FDM fabricated poly carbonate test specimen. They applied signal-to-noise ratio and ANOVA in order to find out which parameter is affected the most to output response. After the experimental work and ANOVA analysis they have find out that the layer thickness and orientation angle are highly significant to the mechanical strength of test specimen whereas raster width has a little importance as compare to other two parameters. Finally they have built the regression model in order to predict the result of mechanical strength. Results are comparing with regression result and both are relatively same which lead to be model successfully applied.

**Sood et al. [11]** have studied the effect of five important FDM machine process parameters such as layer thickness, part build orientation, raster angle, raster width and air gap on the compressive strength of testing specimens. They develop the statistically validated predictive equation to find out optimal process parameters of FDM machine.

Finally, they have found that fibre-fibre bond strength must be strong which can be achieving by controlling the distortions arising during part build stage. Optimal parameters gives the maximum compressive stress of 17.4751

MPa and the optimum value of layer thickness, orientation, raster angle, raster width and air gap as 0.254 mm, 0.036 degree, 59.44 degree, 0.422 mm and 0.00026 mm respectively.

**Bagsik et al. [12]** works on the influence of the orientation and the structure works on the influence of the orientation and the structure of a manufactured parts based on the mechanical data are analyzed. Bagsik influence orientation and the tool path generation of manufactured parts based on the mechanical data are analyzed. The tensile testing result show different strength and strain characteristics that depend on the given structure and as a result of the build direction. The best results were achieved for all directions by using a negative air gap. The thick specimen has better mechanical properties in X and Z directions (81Mpa and 43Mpa). But the thin specimen improves the tensile strength (67Mpa) in Y-direction.

**Bansal et al. [13]** have studied the FDM process parameter such as layer thickness, raster angle and part orientation influence the dimensional accuracy of the parts fabricated using ABS material, due to shrinkage of the filament the dimension of the CAD model does not match with the FDM process part the shrinkage dominates along length and width of the build part where as positive deviation is observed along thickness direction. Influence at each parameter response such as percentage change in length, width, and thickness of build part are studied using response surface methodology the optimization of process parameter is made by using genetic algorithm and finally they get optimum value of process parameter so the dimensional accuracy is improved. After the experimental work they suggest the optimum combination of process parameter to get the improvement in dimensional accuracy.

**Nancharaiah et al. [14]** have conducted the experiment to determining the good surface finish and dimensional accuracy of a part built by the FDM process. It was found that raster angle has little effect on surface quality. The road width and layer thickness affect the surface quality and part accuracy greatly. But air gap has little effect on surface quality of part and more effect on dimensional accuracy of part.

**Galantucci et al. [15]** has studied the influence of FDM process parameter on a crylonitrile butadiene styrene (ABS) prototype surface finish. The surface finish of product after the modification of extrusion parameters have been measured and processed through designed experiment they have also studied the chemical method to improve surface quality of the product. Finally they have found that the slice height and raster width are important parameters while the tip diameter is a little important for surface running either parallel or perpendicular to the build direction. A chemical post processing treatment has been analyzed and yields a significant improvement of the Ra of the treated specimen the proposed chemical treatment is economical, fast and easy to use. When varying the tip dimension, the response variable Ra remains the same while the raster width affects the top surface, also the slice height is an impossible In the present study on the experiments were conducted under various process parameters such as Layer thickness, Orientation, Infill in FDM Machining. The response process parameters are Tensile strength, Tensile Module, Compressive Strength, Compressive Module and Surface roughness of the PLA material using FDM process.

### 3. CONCLUSIONS

- The top-three ranked of the FDM process Parameters almost match with those derived by TOPSIS, and PSI Method.
- The PSI method is highly stable as a comparison to the other method for decision making problems
- It has been observed that PSI method is very simple, stable and robust.
- The PSI method is highly stable for selection of process parameter problems.

### 4. REFERENCES

- [1]. Vinod G. Surange1, Punit V. Gharat, "3D Printing Process Using Fused Deposition Modelling (FDM)" International Research Journal of Engineering and Technology (IRJET) ,2016, 2395-0056.
- [2]. Miguel Fernandez-Vicente, Wilson Calle, Santiago Ferrandiz, and Andres Conejero, "Effect of Infill Parameters on Tensile Mechanical Behavior in Desktop 3D Printing" 3D printing and additive manufacturing ,2016
- [3] N. Vidakis, A. Vairis, M. petousis, K. Savvakis, J. Kechagias, "Fused Deposition Modelling Parts Tensile Strength Characterisation" Academic Journal of Manufacturing Engineering, 2016
- [4]. NAJIM A. Saad, Ahmed Sabah An Investigation of New Design of Light Weight Structure of (ABS/PLA) by Using of Three Dimensions Printing "Materials Engineering, 2016

- [5] Garrett W Melenka, Jonathon S. Schofield, Michael R. Dawson, Jason P.Carey," The Impact of Process Parameters on Mechanical Properties of Parts Fabricated in PLA with an Open-source 3-D Printer", Rapid Prototyping Journal,2015, 21,5
- [6] Todd Letcher ,"Material Property Testing of 3D-Printed Specimen in PLA on an Entry-Level 3D Printer" International Mechanical Engineering Congress & Exposition,2014
- [7] Tymrak BM, Kreiger M, Pearce JM, "Mechanical properties of components fabricated with open-source 3-D printers under realistic environmental conditions", Materials and Design, 2014, 58, 242–246
- [8] Rayegani F, Godfrey C, "Fused deposition modelling (FDM) process parameter prediction and optimization using group method for data handling (GMDH) and differential evolution (DE)", Journal of Engineering Manufacture, 2014, 73, 509-519
- [9] Raut S, Jattib VS, Khedkarc NK, Singh TP, "Investigation of the effect of built orientation on mechanical properties and total cost of FDM parts", Procedia Materials Science, 2014, 6, 1625 – 1630
- [10] Patel JP, M.Tech Thesis, "An Experimental Investigation Of Process Variable Influencing The Quality Of Fused Deposition Modeling Produced Polycarbonate Parts", Ganpat University, Gujarat, 2012.
- [11] Sood AK, Ohdar RK, Mahapatra SS, "Experimental Investigation and Empirical Modeling Of FDM Process For Compressive Strength Improvement", Journal Of Advance Research, 2011, 3, 81-90.
- [12] Bakshi T, Sarkar B, "MCA Based Performance Evaluation of Project Selection",International Journal of Software Engineering & Applications (IJSEA), 2011, 2,pp. 14-22
- [13] Bansal N, Alkahari MR, Boejang H, "Analysis of Fused Deposition Modeling", Journal of Zhejiang University-Science A (Applied physics and science), 2011,11, 972-977.
- [14] Nancharaiah T, Raju DR and Raju VR, "An experimental investigation on surface quality and dimensional accuracy of FDM components", International Journal on Emerging Technologies, 2010, 2, 106-111.
- [15] Galantucci LM, Lavecchia F, Percoco G, "Experimental Study Aiming To Enhance The Surface finish Of Fused Deposition Modeled Parts", Manufacturing Technology, 2009, 58, 189–192.