

Multi-Finishing Machine

Guide Name- Prof. Nilesh Mogare

Handge Vinay Shivaji¹, Handge Tejas Somnath², Dhondge Siddhesh Bhausahab³, Shirsat Swami Manish⁴

^{1,2,3,4} Department of Mechanical Engineering Rajashri Shahu Maharaj Polytechnic, Nashik

ABSTRACT

The Multi-Finishing Machine is a cost-effective, time-saving, and multipurpose machine designed for small scale industries, particularly beneficial for new businesses. By combining multiple finishing processes in one system, it increases productivity while reducing costs and setup time. Its simple construction and ability to perform precise tasks make it ideal for industries prioritizing accuracy and efficiency. This innovation holds great potential for transforming small-scale manufacturing with minimal investment.

Keyword :- Multi-Finishing, Machine Cost-effective, Time-saving & Multipurpose

1. Introduction.

A multi-finishing machine is an advanced piece of equipment that combines various finishing processes into a single unit, allowing for greater efficiency in manufacturing. With the increasing competition in the manufacturing sector, multi-finishing machines help companies streamline operations, reduce costs, and enhance product quality. This machine is a versatile piece of equipment commonly used in industries like metalworking, automotive, and manufacturing, designed to carry out a variety of surface finishing operations on materials, typically metals. These machines are capable of performing multiple functions, such as deburring, polishing, grinding, and surface cleaning, all within a single system. The goal is to improve the material's surface quality, enhance its aesthetic appearance, or prepare it for further processing.

1.1 Problem Statement

The problem is the lack of an integrated, cost-effective machine that combines multiple finishing processes, reducing operational costs and setup time while improving efficiency and product quality in small-scale industries.

1.2 Proposed System Architecture

The proposed system architecture for the multi-finishing machine integrates a robust frame, three-phase motor with gear-driven transmission, and modular finishing units (grinding, polishing, deburring). It includes a centralized control panel, safety features, and ergonomic design for efficient, safe operation. The system is designed for easy calibration and quick tool adjustments, improving productivity and product quality in small-scale industries.

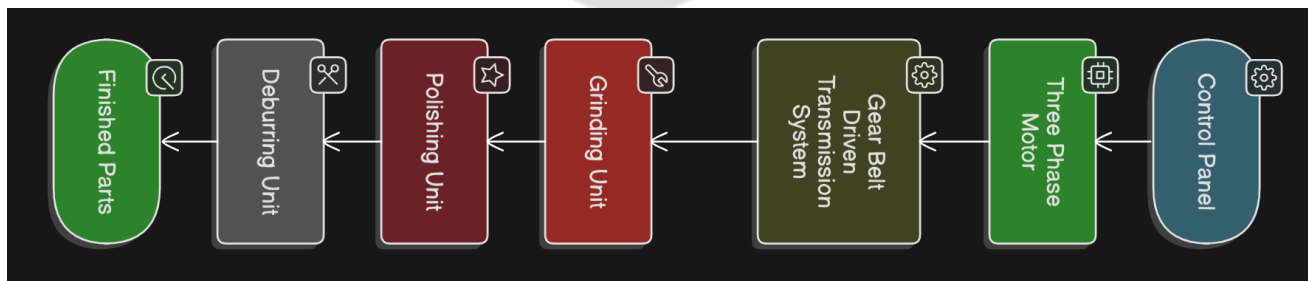


Fig – 1 Block diagram

2. Components.

1. **Frame Structure:** Mild steel frame with anti-corrosion coating.
2. **Three-Phase Motor:** Provides power for high speed and efficiency.
3. **Belt-Driven Transmission:** Efficient power transfer to finishing units
4. **Grinding, Polishing, Deburring Units:** Perform surface finishing operations.
5. **Control Panel:** Manages machine settings and operations.

2.1 Frame Structure:

- Material: Mild steel with anti-corrosion coating
- Classification: Structural Component
- Function: The frame serves as the main support structure of the machine, providing stability and durability. The anti-corrosion coating helps protect the frame from environmental damage, extending the lifespan of the machine and ensuring it remains functional in various working conditions.

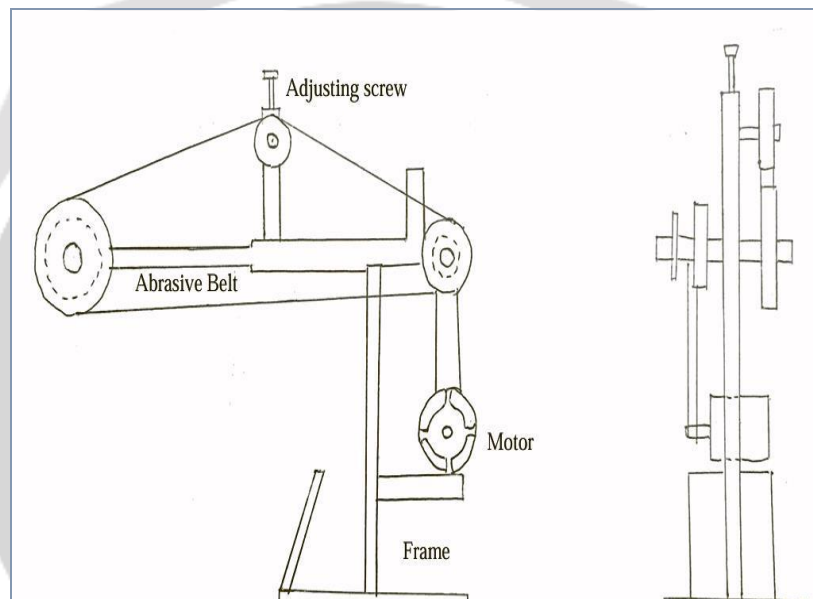


Fig – 2 Frame Structure

2.2 Three-Phase Motor:

- Material/Type: Electric motor, typically three-phase induction motor
- Classification: Power System Component
- Function: The three-phase motor provides the necessary power to drive the machine's operations at high speed and efficiency. It ensures consistent power delivery for smooth and reliable functioning of all finishing processes, such as grinding, polishing, and deburring. Its high efficiency and ability to handle heavy loads make it ideal for industrial applications.



Fig – 3 3 phase motor

3. 3: Belt-Driven Transmission:

- Material: High-strength rubber or polyurethane belts, metal pulleys
- Classification: Power System Component
- Function: The belt-driven transmission transfers power from the motor to the finishing units using a system of belts and pulleys. It offers a smooth, flexible method of power transfer with less mechanical complexity compared to gear systems. While it is typically quieter and more cost-effective, it may require more maintenance over time due to wear and tear on the belts. Belt-driven systems are often used when lower torque and speed are required.



Fig – 4 Belt-Driven Transmission

4. Advantages of the Multi-Finishing Machine Project:

1. Cost-Effective:

Combining multiple finishing processes (grinding, polishing, deburring) into one machine reduces the need for multiple machines, lowering both initial investment and operational costs.

2. Time-Saving:

By integrating various finishing operations into a single system, setup time and machine changeover time are significantly reduced, increasing overall productivity.

3. Increased Productivity:

The machine can perform multiple tasks simultaneously, allowing industries to complete tasks faster, boosting production rates.

4. Space-Saving:

The compact design of the multi-finishing machine eliminates the need for multiple large machines, saving valuable factory space in small-scale industries.

5. Energy Efficiency:

Optimized power usage, especially with the three-phase motor and efficient transmission systems, reduces energy consumption compared to using separate machines for each process.

5. Applications of the Multi-Finishing Machine:

1) Metalworking Industry:

The machine can be used for grinding, polishing, and deburring metal parts, such as automotive components, industrial machinery, and metal frames, improving their surface finish and quality.

2) Automotive Manufacturing:

Ideal for automotive part finishing, the machine can efficiently process parts like engine components, transmission parts, and body panels to ensure smooth surfaces, removing burrs, and achieving a polished finish for both functionality and aesthetics.

3) Aerospace Industry:

Aerospace components require precise and high-quality finishes. The multi-finishing machine is suitable for polishing turbine blades, grinding structural components, and deburring delicate parts to meet strict regulatory standards.

4) Tool and Die Manufacturing:

In the production of molds, dies, and cutting tools, the machine can be used for precise deburring, polishing, and grinding to ensure the high-quality surface finish required for tooling applications.

6. Result and Discussion.

The multi-finishing machine project successfully integrated grinding, polishing, and deburring processes into a single, compact system, significantly improving efficiency and productivity while reducing operational costs, space requirements, and maintenance needs. The machine produced high-quality surface finishes with consistent results, making it ideal for small-scale manufacturers in industries like automotive, metalworking, and jewelry. It provided a cost-effective solution by minimizing the need for multiple machines, while its ergonomic design and safety features ensured ease of use and operator safety. Despite challenges in optimizing the integration of processes, the project demonstrated a promising solution with the potential for further improvements, such as gear-driven transmissions and advanced sensors, offering significant advantages for future industrial applications.

7. Conclusion.

The multi-finishing machine project effectively demonstrates an innovative approach to improving productivity, reducing costs, and enhancing product quality in small-scale manufacturing. By integrating multiple finishing

processes into a single, compact unit, it provides a space-saving, cost-efficient solution for industries like automotive, metalworking, and jewelry. The machine's ability to deliver consistent and high-quality surface finishes while minimizing manual labor and reducing operational time makes it an essential tool for modern manufacturing. With potential for future advancements, such as the incorporation of advanced sensors and gear-driven systems, this project holds great promise for transforming manufacturing operations, especially for small and medium-sized enterprises.

8. Future Work.

We can introduce gear system instead of belt drive in this machine.

1. By using gear drive we will get high coefficient of friction and high rate of power transmission.
2. If gear drive is used then horizontal distance between motor and wheels will decrease.
3. We can use hollow shaft instead of solid shaft at front for mounting finishing wheels.
4. Three phase motor can be used instead of single phase motor for getting more speed (rpm) and more load carrying capacity.
5. Front shaft can be extended on both side for mounting more wheels for different finishing application.

9. Working Images



10. Reference.

Books –

1. Advanced Manufacturing Processes
2. Design of Machine – V. B. Bhandari.
3. Theory of Machine – Khurmi.

Websites –

1. www.wikipedia.com
2. www.youtube.com
3. www.google.com

