

Vacuum braking system

Ravi Gupta.¹, Deepak Kumar Bharti², Pravin Pune³, Nikhil Kumbharde⁴, Prof. Londhe V.D.

¹ Student, Mechanical Department, SND COLLAGE OF ENGINEERING & RESEARCH CENTER
YEOLA, NASHIK-423401, Maharashtra, India

² Student, Mechanical Department, SND COLLAGE OF ENGINEERING & RESEARCH CENTER
YEOLA, NASHIK-423401, Maharashtra, India

³ Student, Mechanical Department, SND COLLAGE OF ENGINEERING & RESEARCH CENTER
YEOLA, NASHIK-423401, Maharashtra, India

⁴ Student, Mechanical Department, SND COLLAGE OF ENGINEERING & RESEARCH CENTER
YEOLA, NASHIK-423401, Maharashtra, India

ABSTRACT

In railway locomotives, vacuum brakes are first used instead of the air brakes. In, the brake pipe, vacuum pump is used for creating vacuum. The integral construction of the brake cylinder uses this vacuum reservoir for the application of brakes. Nowadays many of the light vehicles are fitted with vacuum-assisted hydraulic braking system in which vacuum is created from the engine which reduces the driver effort on foot pedal.

The vacuum braking system was developed from above said reasons and the same analysis for implementation in both heavy and light vehicles. In this system, vacuum is created from engine and used for the making of application of brakes. The system operation is similar to air braking system. In vacuum brake system the vacuum is used rather than of compressed air which is used in air brake system. The design and modified system also includes the Vacuum brake system i.e., the loss of vacuum will cause the brake to be applied due to spring force.

Keywords: Air braking system, Fail safe condition, Heavy vehicle, Hydraulic brake, Light vehicle, Vacuum braking system .

INTRODUCTION

A moving train contains kinetic energy, which needs to be removed from the train for stopping the train. The best way of doing this is to convert the energy into heat. The conversion of kinetic energy into heat is usually done by adding a contact material in between the rotating wheels or to discs which is attached to the axles. The material which is added creates friction and converts the kinetic energy into heat. The speed is slow down and the train stops. For the braking the material used is pad or blocks.

In the world's many trains are equipped with braking systems which use compressed air as the force for pushing the blocks on wheels. Such type of braking system known as "air brakes" or "pneumatic brakes". In these braking system the compressed air is transmitted along the train through a device known as a brake pipe. Different level of air pressure in the pipe causes a change in the magnitude of the brake on each vehicle. This can apply the brake, release it or hold it "on" after a partial application. This system is in limited use all over the world.

There is alternative braking system to the air brake, known as the vacuum brake [VB], which was introduced around the early 1870s, the same time as the air brake. Similar to the air brake, the vacuum brake system is controlled or operated through a brake pipe. But the brake pipe connecting a brake valve in the driver's cab with braking equipment on every vehicle. The operation of the brake equipment on each vehicle depends on the condition of a vacuum created in the pipe by an ejector or exhauster. The ejector, using steam on a steam locomotive, or an exhauster, using electric power on other types of train, removes atmospheric pressure from the brake pipe to create the vacuum. When a full vacuum in the brake pipe, the brake is released & when no vacuum, i.e. normal atmospheric pressure in the brake pipe, that time the brake is fully applied.

The atmospheric pressure means 1 bar or about 14.5 lbs. per square inch. When reducing the atmospheric pressure to 0 lbs. per square inch, it creates a near perfect vacuum which is measured as 30 inches of mercury, written as 30 Hg. Each 2 inches of vacuum therefore represents square about 1 lb. per inch of atmospheric pressure.

In the UK, vacuum brakes operated with the brake pipe at 21 Hg, except on the Great Western Railway which operated at 25 Hg. In the brake pipe the vacuum is created and maintained by a motor-driven exhaustor. The exhaustor has two types of speeds, high speed and low speed. The high speed is switched in to create a vacuum and therefore release the brakes. The slow speed is used to keep the vacuum at the required level to maintain brake release. It maintains the vacuum for preventing small leaks in the brake pipe. The vacuum in the brake pipe is prevented from exceeding its nominated level (normally 21 Hg) by a relief valve, which opens at the setting and lets air into the brake pipe to prevent further increase.

The momentum of a moving body increases with weight and speed of the body as these factors increase improvements in the brake become so important. The adhesion of the wheels and speed of the train are the main factors that determines the total retarding power. The maximum retarding force applied by the brake blocks at wheels depends upon the coefficient of friction between the wheels and the rail and the component of the weight of the wagon on the wheels. Mathematically the retarding force F can be expressed as $F = \mu * W$

Where μ = the coefficient of friction

W = component of weight of wagon on the wheels


If the coefficient of friction becomes equal to unity then the retarding force will be equal to the weight of the wagon. Also the deceleration equals the acceleration due to gravity. Then the braking efficiency is 100%. This is the theoretical limit for braking efficiency. Highly efficient brakes giving a large deceleration might injure the passengers due to sudden stopping of the train. More over this will cause the brake shoes to wear rapidly and their is always the risk of derailment. The braking efficiencies usually vary from 50% to 80%, which enables the train to stop safely with in a reasonable distance. The equations used for the calculations of acceleration can also be used for calculating the braking distance except to the accelerating force becomes the braking force F_b

The brake force $F_b = p * \eta * \mu$

Where p = brake shoe pressure

μ = co-efficient of fricton between brake shoe and wheel

η efficiency of braking

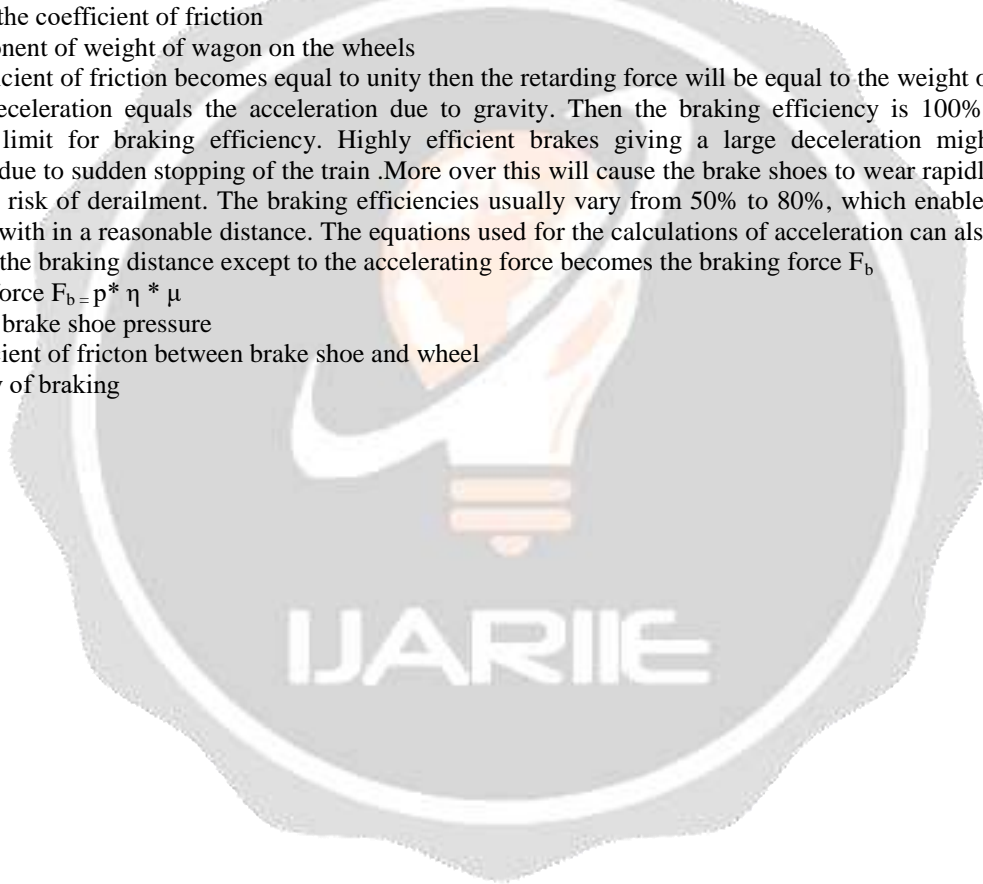

PARTS OF VACCUME BRAKING SYSTEM:

Driver's Brake Valve

The driver brake valve used to control & monitor the brakes. The brake valve will have the following positions: Release, Running, Lap and Brake On. There may also be a Neutral or Shut Down position, which locks the valve out of use. In the release position, the exhauster connects to the brake pipe and switches the exhauster to full speed. This causes rise in the vacuum in the brake pipe as fastly as possible to get a release.

Brake Cylinder

Every vehicles has atleast one cylinder but sometimes two or three cylinders are also there. Inside the cylinder piston is moves which operates the brakes through links called "rigging". The links which is known as rigging applies the blocks to the wheels. The piston in the brake cylinder moves with respect to the vacuum in the brake pipe. Loss of vacuum applies the brakes, whereas restoration of the vacuum releases the brakes.

Vacuum Reservoir

The operation of the vacuum brake depends on the difference in pressure between one side of the brake cylinder piston and the other. Vacuum reservoir is provided to ensure that there is always availability of source of vacuum for operates the brakes. Which is connected to upper side of piston. In the simplest type of the brake cylinder is integral with the vacuum reservoir. Some vehicles has the brake have a separate reservoir and a piped connection to the upper side of the piston.

Brake Block

Brake block is the friction material which is pressed against the piston of brake cylinder. The brake block made of cast iron or some composition material, brake blocks are the main source of wear in the brake system. This brake block require regular inspection to see that they work effectively or not.

Brake Rigging

Brake rigging is the system in which the movement of the piston in the brake cylinder transmits pressure to the brake blocks on each wheel. Rigging can rarely be complex, generally under a passenger car with two blocks to each wheel, making a total of sixteen. The careful adjustment is needed by rigging to ensure that all blocks should be operated from same cylinder which provides the even rate of application on each wheel. When we change one block, that time we have to check and adjust all the blocks on that same axle.

Exhauster

A two-speed rotary machine fitted to a train to deplete the atmospheric pressure from the brake pipe, reservoirs and brake cylinders to release the brakes. This is usually controlled from the driver's brake valve, in which switched in at full speed brake is release or at slow speed to maintain the vacuum at its release level while the train is running. Exhausters can be run directly from a diesel engine.

Brake Pipe


The vacuum-carrying pipe transmits the pressure difference required to control the brake throughout its length. By flexible hoses the brake pipes connected between the vehicles, which can be uncoupled to allow vehicles to be separated. The use of the vacuum system makes the brake safe and prevents from failing of brakes, i.e. the loss of vacuum in the brake pipe will cause the brake to apply.

Dummy Coupling

A dummy coupling point is provided at the ends of each vehicle to allow the ends of the brake pipe hoses to be sealed when the vehicle is uncoupled. The sealed dummy couplings avoids lost from the brake pipe.


METHODOLOGY

The methodology for the Vacuum Braking System as shown in below. The methodology is the systematic way to perform a specific task.

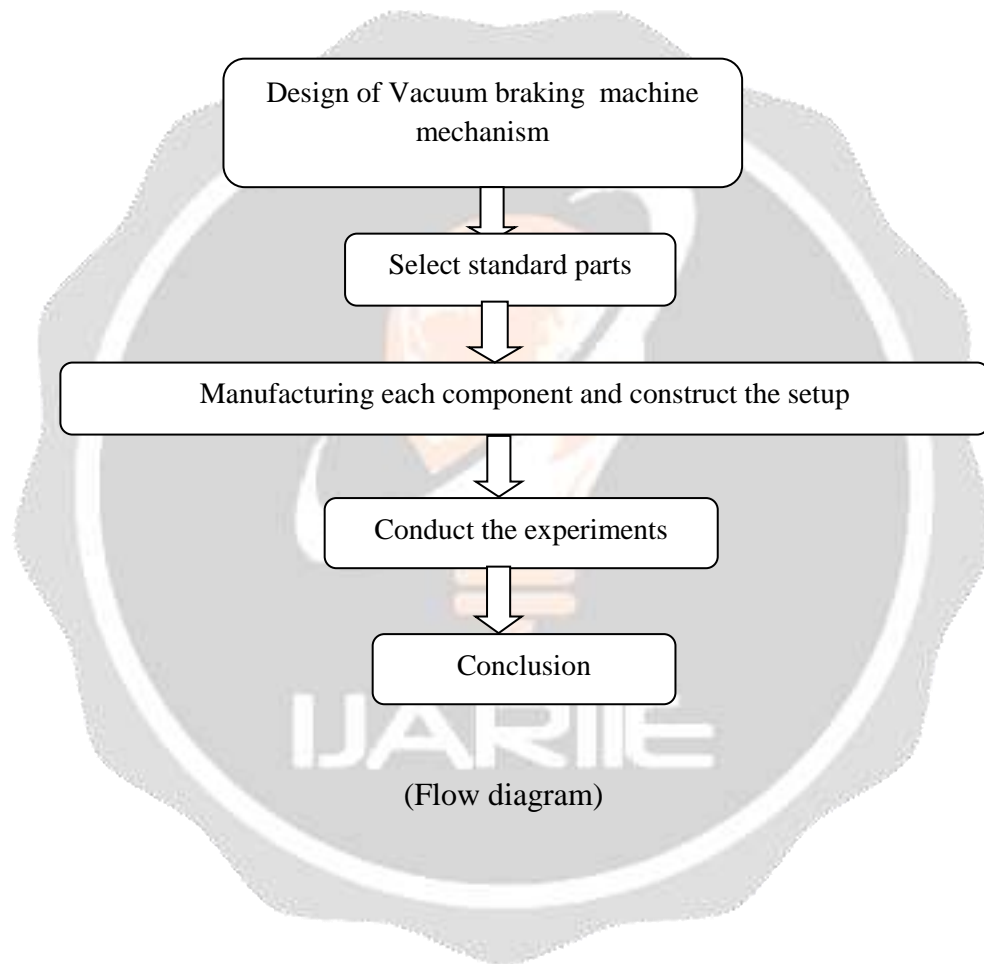

CONSTRUCTION OF VACUUM BRAKING SYSTEM

Vacuum braking system as shown in fig. consists of brake cylinder, compressor, vacuum reservoir, direction control valve, flow control valve, brake hoses, brake linkages, drum brake and foot brake pedal.

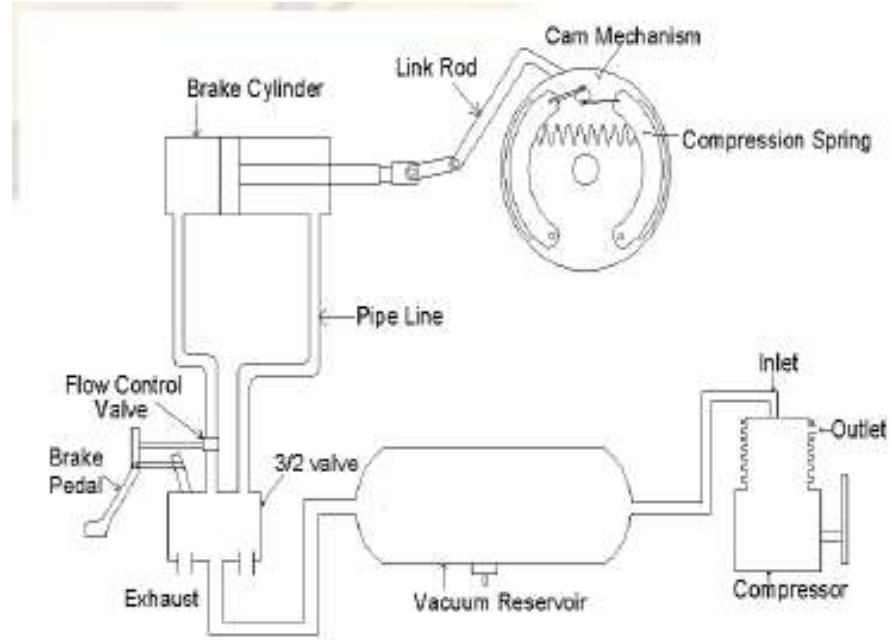

Vacuum braking system

DESIGN OF COMPRESSION SPRING

Spring was designed using standard formulae as listed in the given table.

Table: Specification of spring parameter

Spring parameters	Values
Safe pressure(p)	0.2 N/mm ²
Spring index(C)	4
Wahl's stress factor, K _s	1.40325
Stress (σ _y)	570 N/mm ²
Standard size of wire diameter(d)	9 mm
Mean coil diameter(D)	36 mm
Deflection(y)	20 mm
Stiffness(q)	164.4 N/mm
Number of active turns(n)	8
Total number of turns(N)	10
Solid length(L _s)	90 mm
Free length(L _f)	110 mm
Pitch(p)	12.22 mm



Compression spring

ADVANTAGES:

1. Simple in design.
2. Without any additional equipment ability to get partial release.
3. Greater amount of safety because the vacuum loss age results in the braking of the vehicle.
4. In case of rail wagons, highly reliable.
5. It permit the automatic application of brakes down the entire length of the train from the simple control in the driver's hand.

DISADVANTAGES:

1. On none ejector a vacuum pump is required.
2. Low pressure means relatively large brake cyclinder are required which may be awkward to site.
3. Leaks can be difficult to find.
4. High initial cost.

REFERENCES:

- [1] W. Bartlett, Passenger vehicle Braking Performance with a Disabled Vacuum Power Booster, (1997), SAE paper, 970946.
- [2] Y. Goto, Atsushi Yasuda and Satoshi Ishida, Brake Master Cylinder for Secure Brake Feel and Improved System Failure Performance, (1997), SAE paper 2003-01- 3304.

- [3] S.J. Shaffer, and G.H. Alexander, Commercial Vehicle Brake Testing Part 2 Preliminary Result of Performance-Based Test Program, (1995), SAE paper, 952672.
- [4] Saeed Mohammadi and Asghar Nasr, Effects of the power unit location on in-train longitudinal forces during brake application, International Journal of Vehicle Systems Modelling and Testing, Vol. 5, No.2/3, (2010), pp. 176 – 196.
- [5] B.P. Chinmaya and Raul, G. L. Raul, Modular design and testing for anti- lock brake actuation and control using a scaled vehicle system, International Journal of Vehicle Systems Modelling and Testing, Vol. 2, No.4, (2007), pp. 411 - 427.
- [6] S. Bharath, B.C. Nakra and K.N Gupta, Modelling and analysis of pneumatic railway brake system, Applied mathematical modelling, 14, (1990), 58-66
- [7] Q. Chen, Guangju Xu, Jie Meng and Hongyu Jiao, Study on the brake pedal control model for regenerative braking integrated system, International Journal of Electric and Hybrid Vehicles, Vol. 4, No.3, (2012), pp. 289 – 296.
- [8] D. Lie and C.K Sung, Synchronous brake analysis for a bicycle, Mechanism and Machine Theory, 45 , (2010), 543-554.
- [9] S. Park, Sangwoo Bae and Jang Moo Lee, Numerical evaluation of braking feel to design optimal brake-by-wire system, International Journal of Vehicle Design, Vol. 37, No.1, (2005), pp. 1 - 23.
- [10] Moh Nasr, Noise signatures of brake vacuum booster and their acoustic treatment, International Journal of Vehicle Noise and Vibration, Vol. 7, No.1, (2011), pp. 51 - 67.
- [11] N. Ding, Guizhen Yu and Weida Wang, Estimation of brake pressure and tyre-road friction during ABS activation, International Journal of Vehicle Design, Vol. 58, No.1, (2012), pp. 33 - 45.
- [12] L.J Yang and B.G Hong, Experimental study on braking force characteristics of tugboat, Journal of hydrodynamics, 22(5), supplement: (2010), 343-348

8.BIOGRAPHY



Ravi Rajesh Gupta, student of the Snd Collage of Engineering & Research Center Yeola, Nashik-423401, Maharashtra, India.in the year 2014-2017.In the mechanical Engineering. Work on the project “VACUUM BRAKING SYSTEM”.

Email id-ravig5482@gmail.com

	<p>Deepak kumar Bharti, student of the Snd Collage of Engineering & Research Center Yeola, Nashik-423401, Maharashtra, India.in the year 2014-2017.In the mechanical Engineering. Work on the project“VACUUM BRAKING SYSTEM”.</p> <p>Email id-bhartideepak0@gmail.com</p>
	<p>Pravin Shivram Pune, student of the Snd Collage of Engineering & Research Center Yeola, Nashik-423401, Maharashtra, India.in the year 2014-2017.In the mechanical Engineering. Work on the project “VACUUM BRAKING SYSTEM”.</p> <p>Email id-pravin4949@gmail.com</p>
	<p>Nikhil Motiram Kumbharde, student of the Snd Collage of Engineering & Research Center Yeola, Nashik-423401, Maharashtra, India.in the year 2014-2017.In the mechanical Engineering. Work on the project “VACUUM BRAKING SYSTEM”.</p> <p>Email id- nikhilkumbharde@gmail.com</p>
	<p>Prof.Londhe V.D.Assistant Professor, of the Snd Collage of Engineering & Research Center Yeola, Nashik-423401, Maharashtra, India.in the year 2014-2017.In the mechanical Engineering. Work on the project “VACUUM BRAKING SYSTEM”.</p> <p>Email id- vikrant4787@gmail.com</p>