

Application of Gaseous Fuel in Dual Fuel Mode: A Review

Rahul Singh Jaat and Neeraj Yadav

¹M.Tech Scholar, ²Assistant Professor
Mechanical Engineering Department
RKDF College of Technology, Bhopal, India.

Abstract

Diesel motor (i.e., CI engine) is utilized to produce power for different fixed applications in remote places because of the non-accessibility of unified lattice availability. The consuming diesel in CI motor prompts non-renewable energy source consumption and natural corruption. Subsequently, there is an enormous interest of creating far off power by using accessible inexhaustible assets with the assistance of existing CI motors. In this paper application of different gaseous fuels such biogas, producer gas, hydrogen and acetylene in diesel engine has been discussed. The review is coordinated in two segments. The principal segment zeroed in on conceptualizing the impact of these vaporous fills in CI motor as auxiliary fuel under double fuel (DF) mode with diesel/biodiesel as pilot fuel. The impact of different working boundaries on the exhibition, ignition and outflow qualities have been surveyed. It is obvious from the review that acceptance of vaporous fuel decreases the motor exhibition somewhat, but outflow qualities answered to be improved. Notwithstanding, changes in the working conditions bring with monstrous extension in the improvement of the motor exhibition. The review fosters an unmistakable comprehension on the conceivable outcomes of these gases to be utilized as an essential hotspot for creating provincial power. In the subsequent segment, a conversation on the execution of such advancements in different provincial regions of India considering the biomass capability of the nation has been tended to. A comprehensive audit is additionally done on different power creating units in India controlled by BG and PG independently. The writing on utilization of joined BG and PG units for energy age are restricted and no reasonable financial model has been created thinking about these gases for provincial force age. This review gives a total knowledge to each professional and cons related with such force creating units and its financial effects on country vocation.

Keywords: Biodiesel; Biofuels; Gaseous Fuels; Diesel Engine; Waste to Energy

1.Introduction

The need of new fuels is very much essential. In this context waste derived fuels, renewable fuels could fundamentally contribute towards accomplishing the 2030. What's more, 2030 objectives of subbing roughly 20% and 30% of petrol-diesel with biofuels in US and EU, individually. Also, achieving the anticipated yearly creation pace of 227 billion liters of biofuel by most dynamic partners in the biodiesel business could be handily accomplished. This audit expects to dissect the exhibition of biodiesel powers got from waste derived fuels and to show the appropriateness of applying these powers as substitutes to mineral diesel in different businesses. Advantages of biofuels are discussed follows. It has been discovered that [1-4] flawless vegetable oil can be utilized as diesel fuel in customary diesel motors, which prompts the following issues:

- Types and grade of oil and nearby climatic conditions.
- The infusion, atomization and ignition attributes of vegetable oils in diesel motor are essentially extraordinary from those of the diesel fuel.
- High consistency of vegetable oil meddles with the infusion cycle and prompts helpless fuel atomization.
- The wasteful blending of oil with air adds to fragmented ignition, prompting hefty smoke discharge.
- The high glimmer direct characteristics toward lower instability qualities.
- Both cloud and pour focuses are fundamentally higher than that of diesel fuel. These high qualities may cause issues during chilly climate.
- Lube oil weakening.
- High carbon stores.
- Ring staying.
- Scraping of the motor liner.
- Infusion spout disappointment. Issues in utilizing vegetable oils in CI motors

The combustion of fossil fuel produces CO₂ which is considered as GHG emissions. Figure 1 gives information about various sources where GHG gas emissions comes.



Fig.1 GHG gas status with respect to fuel [5]

The interest in replacement of diesel is multiple times higher than the interest in petroleum in India. Figure 2 shows the potential biofuels where researchers are doing their work on the use of those fuel. In any case, while the ethanol business is set up; the biodiesel industry is as yet in its outset. India's current biodiesel decision of innovation is the transesterification of vegetable oils. The Government detailed an aspiring National Biodiesel mission to meet 20% of the nation's diesel necessities by 2011–2012. Since the interest for palatable vegetable oil surpasses gracefully, the public authority has chosen to utilize non-palatable oil from jatropha curcas seeds as biodiesel feedstock. The National Biodiesel Mission will be executed in two phases. An exhibition venture completed over the period 2003–2007 pointed toward developing 400,000 ha of jatropha to yield about 3.75 tons Factor influencing motor execution utilizing biodiesel [6-7]. The accompanying variables are considered by utilizing biodiesel as motor fuel.

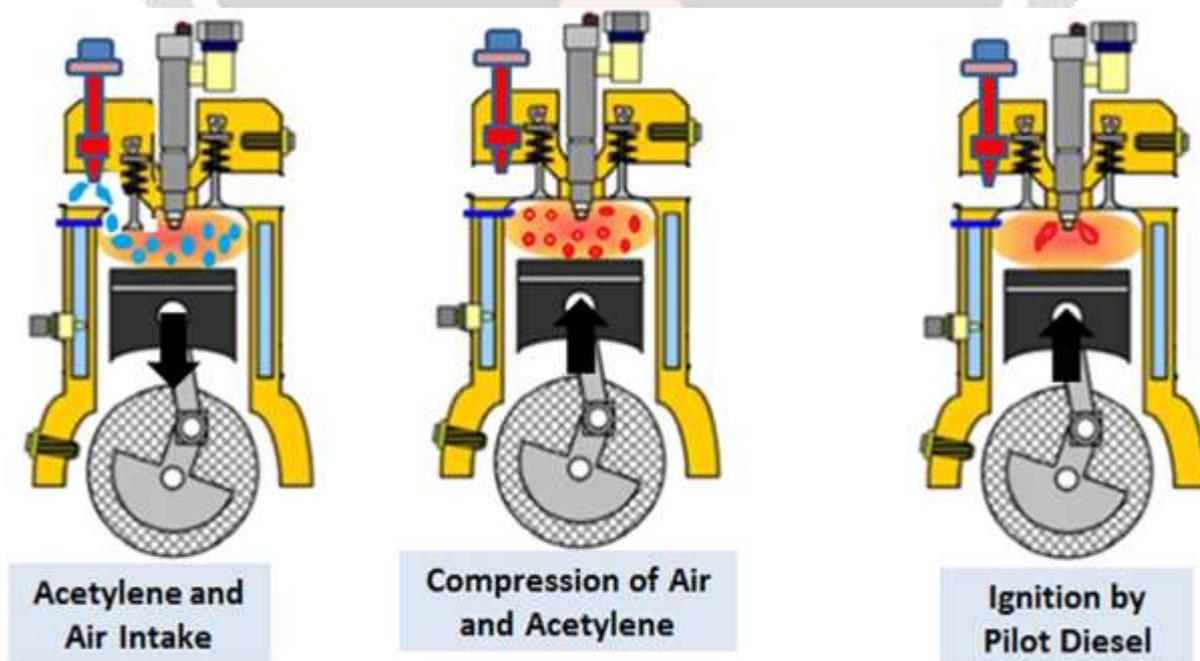


Fig. 2 Working of dual fuel engine operation [8]

2. Biodiesel

BP and force will in general be 3–5% lower when utilizing biodiesel when compared to diesel. This is because of the way that biodiesel fuel has less energy per unit volume than customary diesel fuel. Eco-friendliness will in general be marginally lower when utilizing biodiesel because of the lower energy substance of the fuel. Commonly, the drop-off is in a similar reach as the decrease in pinnacle motor force (3–5%).

3. Alcohol

Momentary motor wear when utilizing alcohol has been estimated to be not as much as that of oil diesel. Motors are normal to encounter less wear over the long haul when utilizing alcohol.

4. Gaseous Fuel

Stores and stopping up due to gaseous fuel have been broadly detailed yet are commonly recognizable to biodiesel that is both of inferior quality or has gotten oxidized. In the event that fuel quality is high, stores in the motor ought not ordinarily be an issue. The gaseous fuel is being used as dual fuel, manifold injection etc.

5. Contamination from use of bio-diesel in diesel engine

Biodiesel brings about considerably less air contamination because of its higher oxygen substance and absence of both "fragrant mixes" and sulfur. The one special case for this is nitrogen oxide (NOx) discharges, which will in general be marginally higher when utilizing biodiesel. Appropriate tuning of the motor can limit this issue.

6. Chilly climate execution

Like oil diesel, motors tried in chilly climate regularly experience huge issues with activity caused essentially by stopping up of the channels or potentially stifling of the injectors. The utilization of stream improving added substances and "winter mixes" of biodiesel and lamp oil has been considered.

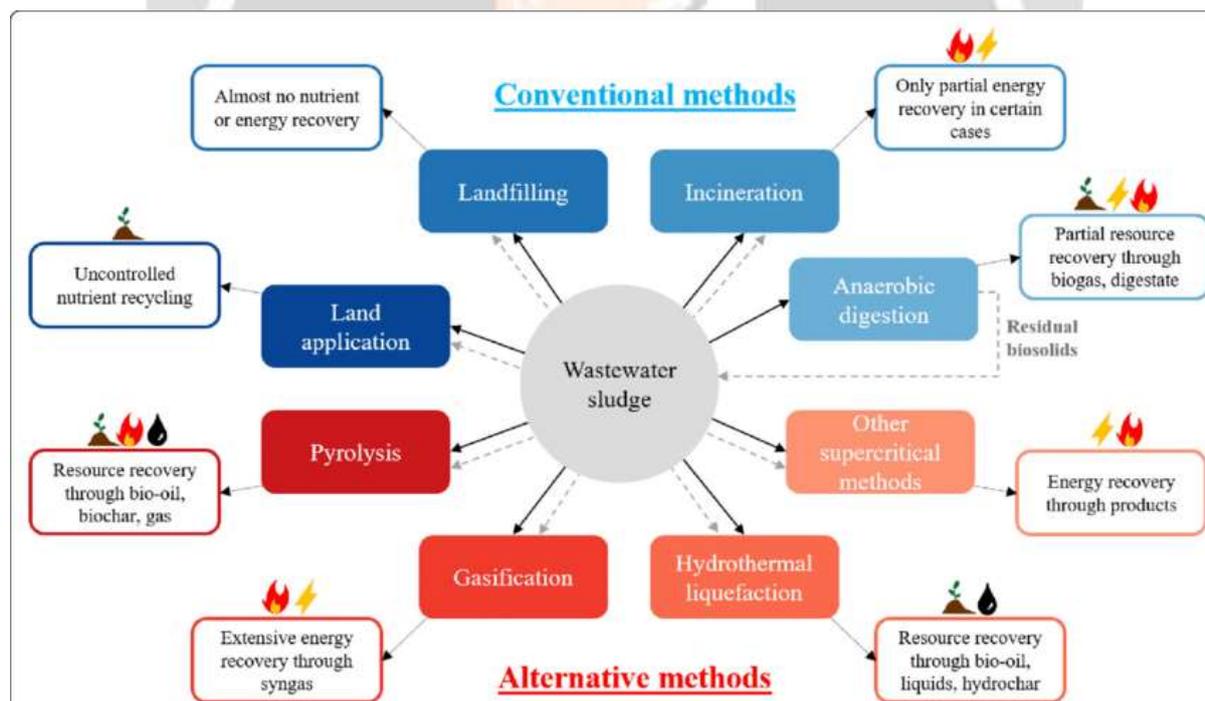


Fig. 3. Alternative ways of waste to energy conversion [9]

The gaseous fuel demonstrated powerful at expanding the reach of working temperatures for biodiesel fuel. Unadulterated biodiesel tends to work well at temperatures down to around 5 °C (this changes recognizably relying upon the sort of oil utilized). Added substances commonly lessen that range by around 5–8°, while winter mixes have demonstrated successful at temperatures as low as –20 °C and beneath [10].

India positions 6th on the planet regarding energy interest representing 3.5% of world business energy interest in 2001. During 2004–2005, the nation imported 95.86 million tons (MT) of unrefined petroleum esteemed at 26

billion U.S dollar. The Indian economy is expected to develop at the pace of over 6% per annum which will require energy interest to ascend to 166 MT by 2019 and 622 MT by 2047. As of now, 70% of the petroleum product necessities are imported setting a hefty weight on nation's equilibrium of instalments. The nonstop increment of unrefined petroleum cost along with the vagueness in value patterns brought about by the restricted unrefined petroleum creation has constrained India to consider biodiesel as another option.

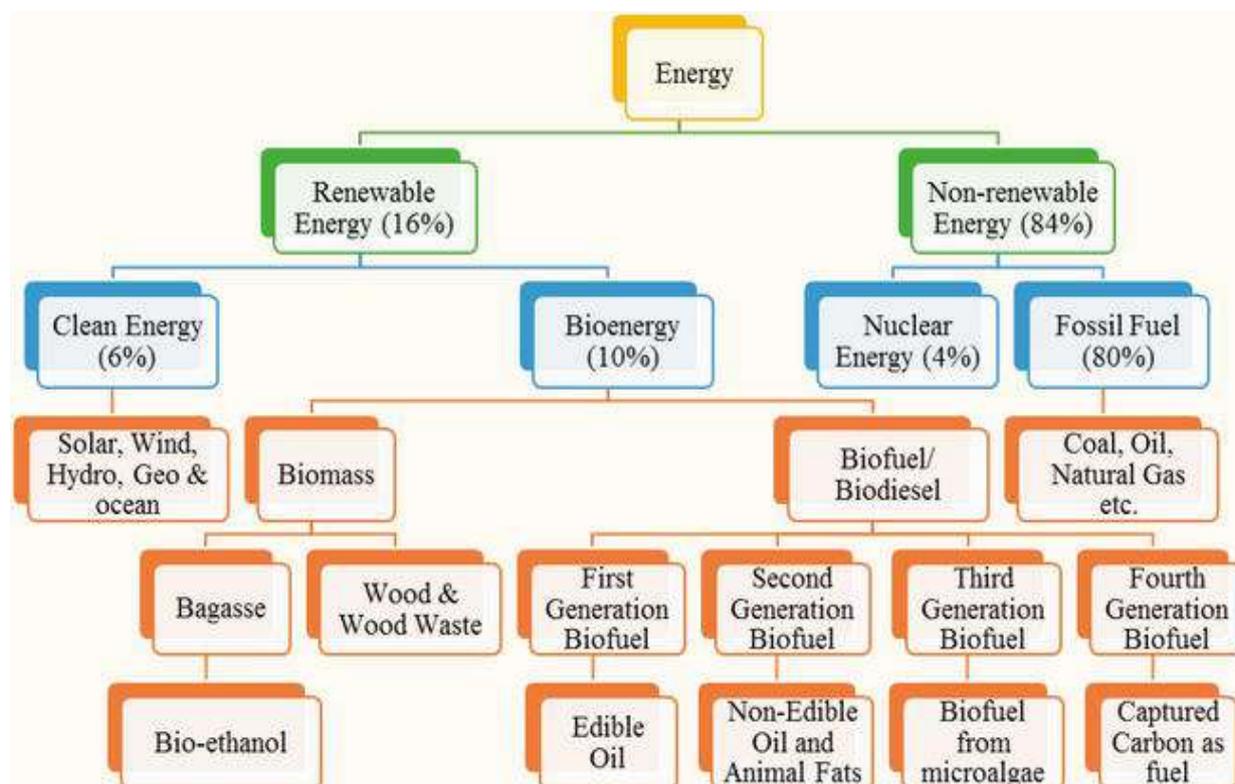


Fig. 4 Potential Fuels [11]

Biodiesel from jatropha and pangamic, accept noteworthy and are thought of best viewed as most ideal alternative to substitute oil fuel there by decreasing the reliance on imported oil. Notwithstanding give energy security and a diminished reliance on oil imports, biodiesel offer a few other huge advantages, for example, decreased GHG outflow, great fuel properties for vehicles, expanded business in the agrarian area and change of no man's land into gainful land. The most ideal approach to utilize vegetable oil as fuel is to change over it into biodiesel [12-13]. Biodiesel is the name of a spotless consuming mono-alkyl ester based oxygenated fuel produced using regular, inexhaustible sources such as new/utilized vegetable oils and creature fats. The subsequent biodiesel is very like customary diesel in its primary attributes. Biodiesel contains no oil-based goods; however, it is viable with traditional diesel and can be mixed in any extent with mineral diesel to make a stable biodiesel mix. The degree of mixing with oil diesel is alluded as Bxx, where xx demonstrates the measure of biodiesel in the mix (for example B10 mix is 10% biodiesel and 90% diesel). It very well may be utilized in CI motor with no significant change in the motor equipment. Public biodiesel mission. the extent of biodiesel in mixes is Chauhan et al. researched that start begins before for biodiesels contrasted with diesel fuel [14-15].

7. Conclusion

Overall, we can say that this the need of hour to find the replacement of diesel fuel by some non-conventional fuel. In this regard biodiesel, alcohol, methanol, ethanol, propanol, butanol, tyre derived fuel, waste wood derived fuel, gaseous fuel such as CNG, LPG, Acetylene, producer gas can be potential substitute.

Reference

- [1] Duan P, Jin B, Xu Y, Wang F. Co-pyrolysis of microalgae and waste rubber tire in supercritical ethanol. *Chemical Engineering Journal*. 2015 Jun 1; 269:262-71.
- [2] Kumar N, Sonthalia A, Pali HS. Alternative fuels for diesel engines: New frontiers. In *Diesel and Gasoline Engines* 2018 Nov 5. Intech Open.

- [3] Senthil Kumar M, Ramesh A, Nagalingam B. Investigations on the use of Jatropha oil and its methyl ester as a fuel in a compression ignition engine. *Journal of the Institute of Energy*. 2001; 74(498):24-8.
- [4] Kalnes TN, Shonnard DR, Schuppel A. LCA of a spent lube oil re-refining process. In *Computer Aided Chemical Engineering 2006 Jan 1* (Vol. 21, pp. 713-718). Elsevier.
- [5] Katiyar V. *Studies in the reclamation of Lube Oils* (Doctoral dissertation, Aligarh Muslim University).
- [6] Thamilarasan J, Kolappan S, Pushpakumar R, Sharma A. Investigation of plastic Pyrolysis oil performance on CI engine blended with magnesium oxide nanoparticle using Taguchi method. *Materials Today: Proceedings*. 2021 Apr 7.
- [7] Banapurmath NR, Tewari PG, Hosmath RS. Performance and emission characteristics of a DI compression ignition engine operated on Honge, Jatropha and sesame oil methyl esters. *Renewable Energy*. 2008 Sep 30; 33(9):1982-8.
- [8] Sharma A, Murugan S. Combustion Analysis of a Diesel Engine Run on Non-conventional Fuel at Different Nozzle Injection Pressure. In *Innovations in Energy, Power and Thermal Engineering 2022* (pp. 109-118). Springer, Singapore.
- [9] Arpa O, Yumrutas R, Demirbas A. Production of diesel-like fuel from waste engine oil by pyrolytic distillation. *Applied Energy*. 2010 Jan 1; 87(1):122-7.
- [10] Sharma A, Khatri D, Goyal R, Agrawal A, Mishra V, Hansdah D. Environmentally Friendly Fuel Obtained from Pyrolysis of Waste Tyres. In *Energy Systems and Nanotechnology 2021* (pp. 185-204). Springer, Singapore.
- [11] Behera P, Murugan S, Nagarajan G. Dual fuel operation of used transformer oil with acetylene in a DI diesel engine. *Energy conversion and management*. 2014 Nov 1; 87:840-7.
- [12] Behera P, Murugan S. Combustion, performance and emission parameters of used transformer oil and its diesel blends in a DI diesel engine. *Fuel*. 2013 Feb 1; 104:147-54.
- [13] Sharma A, Gupta G, Agrawal A. Utilization of waste lubricating oil as a diesel engine fuel. In *IOP Conference Series: Materials Science and Engineering 2020 May 1* (Vol. 840, No. 1, p. 012015). IOP Publishing.
- [14] Sharma A, Dhakal B. Performance and Emission Studies of a Diesel Engine Using Biodiesel Tyre Pyrolysis Oil Blends. *SAE World Congress & Exhibition*, 8 April 2013, Detroit, US. Paper No. - 2013-01-1150. (doi: 10.4271/2013-01-1150)
- [15] Khatri D, Goyal R, Sharma A. Effects of Silicon Dioxide Nanoparticles on the Combustion Features of Diesel Engine Using Water Diesel Emulsified Fuel. In *Energy Systems and Nanotechnology 2021* (pp. 119-130). Springer, Singapore.