

Design and analysis of let-off mechanism in shuttle loom

Keyur Panchal¹, U.A.Patel²
Student ME (CAD/CAM)¹, Associate Professor²
Mechanical Engineering Department, L.D. College of Engineering, Ahmedabad, Gujarat
keyur589@live.com¹,

Abstract

Weaving machine (loom) has very wide scope in modern textile. Shuttle and shuttle less weaving machines are widely used in textile industry. Tremendous developments has occurred in the field of shuttle less looms. As per Indian tradition, people have demand of clothes without selvage and low price. Therefore, it is necessary to develop the let-off mechanism of shuttle loom to achieve superior and cheap fabric quality of clothes.

There are five basic mechanisms in shuttle loom, shedding, picking, beat up, let-off and take up. Let off is the secondary motion, it is also known as warp unwinding or warp releasing motion. The main function of the let mechanism is to deliver the warp to the weaving area at required rate and the constant tension by unwinding it from the weaver's beam. Length of the path traveled by catch holder varies for different position of intermediate rod in leverage system and subsequently the cover factor and fabric quality of clothes are changed. Torque requirement at the crank has to be fulfilled by the driving motor. Kinematic and dynamic analysis of the compound mechanism can be performed to obtain the torque required at the crank to run the mechanism flawlessly.

Keywords: Leverage System, Cover Factor, Shuttle loom.

Introduction

Weaving is a method of fabric production in which two distinct sets of yarns or threads are interlaced at right angles to form a fabric or cloth. The longitudinal threads are called the warp and the lateral threads are the weft or filling. The method in which these threads are interwoven affects the characteristics of the cloth. Cloth is usually woven on a loom, a device that holds the warp threads and inserts weft threads into it. The warp and filling threads interlace with each other is called the weave.

1.1 Shuttle loom

The shuttle loom is the oldest type of weaving loom which use shuttle that contains a bobbin of filling weft thread that pass through the warp and return back to its original position. The shuttle is batted across the loom and during this process; it leaves a trail of the filling rate of about 110 to 225 picks per minute (ppm). It is very effective and versatile. The shuttle looms are slow and noisy.

1.2 Shuttle less Loom

The shuttle less loom is also used in weaving loom which uses different devices other than the shuttle, which passes weft from one side to another side of loom. There are many type of shuttle less looms are used for weaving such as Projectile Looms, Rapier Looms, Water Jet Looms and Air Jet Looms.

Weaving Operations

1.2.1 Shedding:

In weaving, the shedding is the temporary separation between upper and lower warp yarns or threads through which the weft is passing. The shed is created to make it easy to pass the weft into the warp and thus produce fabric on loom. Many of looms have some sort of device which separates some of the warp threads from others. This is called the shed and allows for a shuttle carrying the weft thread to move through the shed perpendicular to the warp threads. In shedding some of warp threads are raised, some are lowered.

1.2.2 Picking



The picking mechanism which passes weft thread from one side of the fabric to the other side using any one of shuttle, a projectile, a rapier, a needle, an air jet, a water jet. Inserted weft thread is known as pick. The shuttle is normally pointed at one end that passes through the shed. The filling yarn or weft thread comes through a hole in the shuttle as it moves across the loom. A single cross of the shuttle from one side of the loom to the other side is known as a pick. The shuttle is used to insert the weft thread through the warp threads, and this operation is known as a picking operation.

KINEMATIC ANALYSIS OF LET-OFF DRIVE MECHANISM

In this chapter kinematic analysis of let-off drive mechanism has been carried out. Loop closure approach has been used to carry out analysis. The analysis carried out in this chapter which helps in deriving the acceleration and velocity behavior of the compound mechanism.

The advantage of the spreadsheet is that one need to transform the equation in the form of cell address of the data for a particular position. And once the data is generated, simply by dragging down one can have the output of the links for position, velocity and acceleration for each and every input angle of the crank. From the generated data we can have the graph of the performance of the link for a particular angle of the input link. These graphs can be helpful to observe how a link will behave throughout its one cycle.

1. Position, velocity and acceleration analysis of let-off drive mechanism

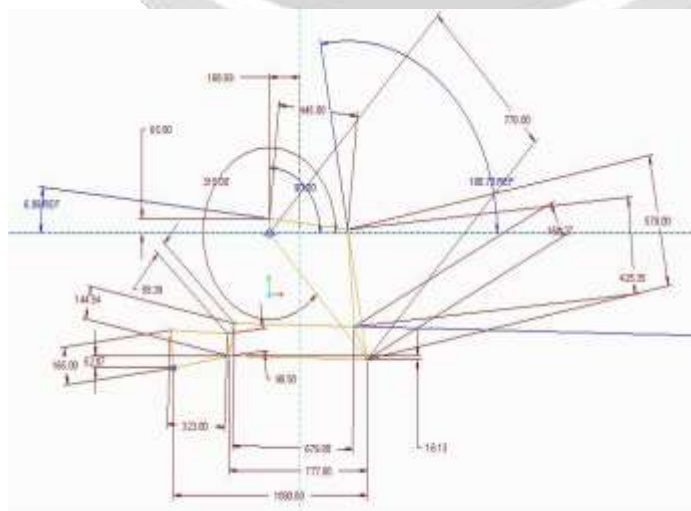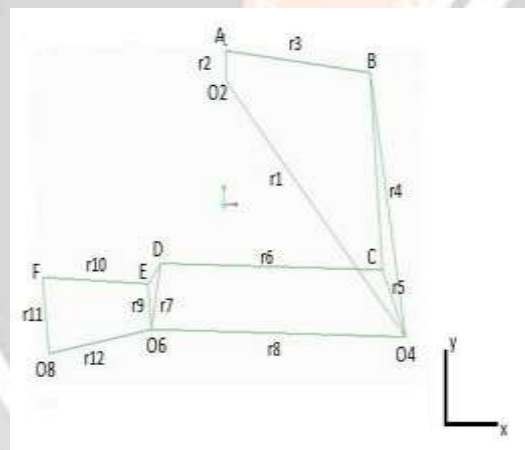

Position, velocity and acceleration analysis for crank-rocker

Mechanism

Acceleration of link 3 and link 4 for crank-rocker mechanism (θ_3 and θ_4) are solved based on the loop closure equations.

$$A = 2r_1r_4 \cos \theta_1 - 2r_2r_4 \cos \theta_2 \quad (3.1)$$

$$B = 2r_1r_2 \cos \theta_1 - 2r_2r_4 \sin \theta_2 \quad (3.2)$$

$$C = r_1^2 + r_2^2 + r_4^2 - r_3^2 - 2r_1 r_2 (\cos \theta_1 \cos \theta_2 + \sin \theta_1 \sin \theta_2) \quad (3.3)$$

$$\theta_4 = 2 \arctan \left[\frac{-B + \sigma \sqrt{B^2 - C^2 + A^2}}{C - A} \right]; \sigma = \pm 1 \quad (3.4)$$

$$\theta_3 = \arctan \left[\frac{r_1 \sin \theta_1 + r_4 \sin \theta_4 - r_2 \sin \theta_2}{r_1 \cos \theta_1 + r_4 \cos \theta_4 - r_2 \cos \theta_2} \right]; \sigma = \pm 1 \quad (3.5)$$

$$r_A = r_2 = r_2 (\cos \theta_2 i + \sin \theta_2 j) \quad (3.6)$$

Velocity Equations

$$\begin{bmatrix} -r_3 \sin \theta_4 & r_4 \sin \theta_4 \\ -r_4 \cos \theta_3 & r_4 \cos \theta_4 \end{bmatrix} \begin{Bmatrix} \dot{\theta}_3 \\ \dot{\theta}_4 \end{Bmatrix} = \begin{bmatrix} r_2 \ddot{\theta}_2 \sin \theta_2 \\ r_2 \ddot{\theta}_2 \cos \theta_2 \end{bmatrix} \quad (3.7)$$

$$\ddot{r}_A = \ddot{r}_2 = (-r_2 \ddot{\theta}_2 \sin \theta_2 - r_4 \ddot{\theta}_2^2 \cos \theta_2) i + (r_2 \ddot{\theta}_2^2 \cos \theta_2 - r_2 \dot{\theta}_2^2 \sin \theta_2) j$$

$$\ddot{r}_B = (-r_4 \ddot{\theta}_4 \sin \theta_4 - r_4 \dot{\theta}_4^2 \cos \theta_4) i + (r_4 \dot{\theta}_4^2 \cos \theta_4 - r_4 \dot{\theta}_4^2 \sin \theta_4) j$$

For input values of our interest, Solving above equations.

Input Variables :-



$$\theta_2 = 90, \dot{\theta}_2 = 12.56 \frac{\text{rad}}{\text{s}} \quad \ddot{\theta}_2 = 0 \text{ rad/s}^2$$

DYNAMIC ANALYSIS OF LET-OFF DRIVE MECHANISM

In this chapter dynamic analysis of let-off drive mechanism has been carried out. Dynamic equilibrium equations has been used to calculate force values. The analysis carried out in this chapter which helps in deriving the force and moments acting on link members. Arc length of the catch holder is a critical design parameter. For various possible combinations of joint will be calculated.

Dynamic analysis is carried out to obtain the torque required at the crank to run the mechanism at the constant given rpm. The Kinematic analysis results are useful for calculating the dynamic properties of the link members. The link masses are considered at the center of gravity of the link. It is to be considered that the mechanism as a planner mechanism to simplify our problem. Also the link shapes are simplified to obtain the solution.

Free body diagram of the crank rocker mechanism

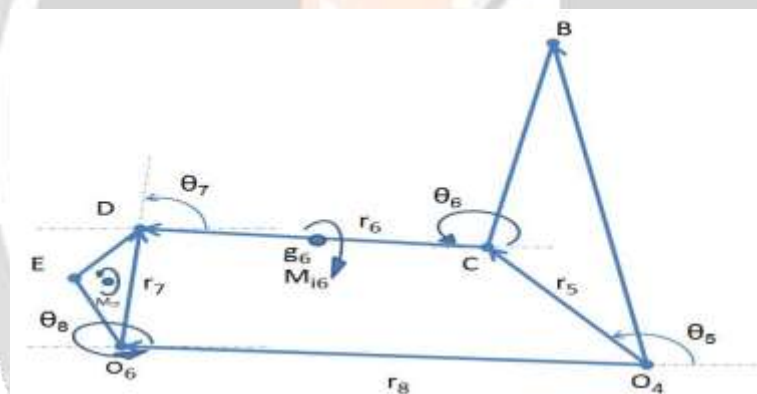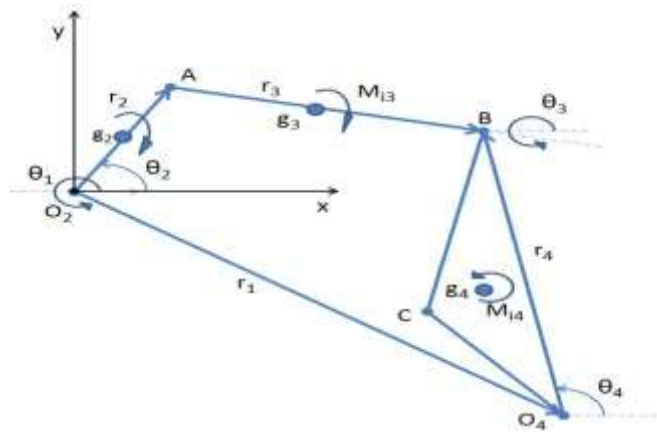

Specification of loom

Crank radius (r_2) = 0.065 m.

Crank arm (Connecting rod) (r_3) = 0.445 m.

Rocker arm (Sley sword) (r_4) = 0.578 m.

Center distance between two fixed links (r_1) = 0.778m.

distance between fulcrum of slay sword and regulating rod (r_5)=0.160m

Regulating rod (r_6)=0.679m

Oscillator (r_7)=0.144m

Distance between two fixed links (sley sword and oscillator) (r_8)=0.777m

Joint rod (r_{10})=0.323m

Oscillating lever (r_{11})=0.165m

Distance between two fixed links (oscillator and oscillating lever) (r_{12})=0.318m

Crank mass (m_2) = 32 kg.

Connecting arm mass (m_3) = 3 kg

Rocker arm (Total lumped mass) (m_4 and m_5)= 5 kg

Mass of regulating rod (m_6)=1.04 kg

Oscillator mass (m_7 and m_9)=1.12 kg

Joint rod mass (m_{10})=1.5 kg

Oscillating lever mass (m_{11})=2 kg

Crank angle (θ_2) = 0 to 360 degrees
 Loom speed (N) = 120 rpm
 Rocker angle (Slay angle) (θ_1) = 13.5degree

Conclusion

In this review paper, size specification of shuttle looms Let off mechanism for different combination of joint rod end position, arc length of the last link is calculated. The length of path travel by catch holder is obtained for different position of intermediate rod of leverage system, which improves cover factor and fabric quality of clothes.

References

1. N. Inui and M. kurata, " Studies on let off motion ", Journal of the textile machinery society of Japan, 11(3), p108-118,1965.
2. Yixuan Wang, Ying Wang, Xin Liu, Yongji Yu and Xuchen Wangand, "Research on virtual prototype of take-up and let-off mechatronics of new loom ", International conference on mechatronics and automation, august 4-7-2010, xian, china.
3. George E. Clentimack, " Warp let off mechanism ", US Patent No.: 2539296, Jan 23, 1951
4. Yukio Mizuno, Takeshi Oguro, " Let-Off Mechanism of Loom ", US Patent No.: 3750715, Aug 7, 1973.
5. Shinichi Hososno and Kazuyoshi Kida, " Let off motion in loom ", US Patent No.: 3753451, Aug 21 1973
6. Rensselaer Renolds, " Improvement in Let-Off mechanism for looms ", US Patent.: 88906, April 13, 1869
7. Xiaozhen Qu, Dojoong Kim, Kinematic design and analysis of a four-bar linkage-type continuously variable valve actuation mechanism , Mechanism and Machine Theory 57 (2012) 111_125, July 20, 2012
8. Winfred Page Enloe, " Warp let off mechanism for looms ", US Patent No.: 3105524
9. Thompson, " Warp let off mechanism for looms ", US Patent.: 376353, Oct 1, 1963
10. Umang S. Modi, " Design and Analysis of Picking Cam for High Speed Shuttle Loom" , IIT Roorkee, India, Dec 18-20 2013
11. P.K.hari and B.K.behta, " Development in Weaving Machines" , Indian journal of Fibre and Textile Research Vol.19 , September 2000