

Experimental study on the effect of Cutting Parameters on Surface Finish obtained in CNC Turning Operation

Rai Sanjay¹, Suthar Nishith², Patel Sanket³, Rajput Bhavik⁴

¹ Pursuing 8th Sem, Mechanical Engineering Department, SVBIT, Gujarat, India

² Pursuing 8th Sem, Mechanical Engineering Department, SVBIT, Gujarat, India

³ Pursuing 8th Sem, Mechanical Engineering Department, SVBIT, Gujarat, India

⁴ Pursuing 8th Sem, Mechanical Engineering Department, SVBIT, Gujarat, India

ABSTRACT

This paper deals with finding optimal control parameters to get the minimum Surface roughness. It considers the analysis of effect of the process parameters, cutting speed, feed rate and depth of cut on cutting forces during turning operation. Machining is the process of removing the excess material from the work piece or unwanted material from the work piece using cutting tool. Surface finish obtained in machining process depends upon so many factors like work material, tool material, tool geometry, machining conditions, cutting fluids used and feed rate etc. In this experimental work it is planned to study the effect of process parameters on surface finish obtained in the machining process of materials like D2 Steel and AISI 304 Steel.

Keywords : - Cutting speed, Feed, Depth of Cut and Surface roughness

1. Introduction

Metalworking is the process of working with metals to create individual parts, assemblies, or large scale structures. The term covers a wide range of work from large ships and bridges to precise engine parts and delicate jewelry. It therefore includes a correspondingly wide range of skills, processes, and tools. Cutting is a collection of processes wherein material is brought to a specified geometry by removing excess material using various kinds of tooling to leave a finished part that meets specifications. The net result of cutting is two products, the waste or excess material, and the finished part. If this were a discussion of woodworking, the waste would be sawdust and excess wood. In cutting metals the waste is chips and excess metal. These processes can be divided into chip producing cutting, generally known as machining. Burning or cutting with an oxy fuel torch is a welding process not machining.

1.1 Turning

Turning is a machining process in which a cutting tool, typically a non-rotary tool bit, describes a helical tool path by moving more or less linearly while the work piece rotates. The tool's axes of movement may be literally a straight line, or they may be along some set of curves or angles, but they are essentially linear (in the nonmathematical sense). Usually the term "turning" is reserved for the generation of external surfaces by this cutting action, whereas this same essential cutting action when applied to internal surfaces (that is, holes of one kind or another) is called "boring". Thus the phrase "turning and boring" categorizes the larger family of (essentially similar) processes. The cutting of faces on the work piece (that is, surfaces perpendicular to its rotating axis), whether with a turning or boring tool, is called "facing", and may be lumped into either category as a subset.

1.2 Cutting Parameters

In turning, the speed and motion of the cutting tool is specified through several parameters. Out of the many parameters affecting the surface roughness of a metal these parameters are selected for each operation based upon the work-piece material, tool material, tool size, and more.

Spindle speed - The rotational speed of the spindle and tool in revolutions per minute (RPM). The spindle speed is equal to the cutting speed divided by the circumference of the tool.

Depth of cut -Cutting speed and feed rate come together with depth of cut to determine the material removal rate, which is the volume of work-piece material (metal, wood, plastic, etc.) that can be removed per time unit.

Feed rate - The speed of the cutting tool's movement relative to the work-piece as the tool makes a cut. The feed rate is measured in inches per minute (IPM) and is the product of the cutting feed (IPR) and the spindle speed (RPM).

2. Experimental Procedure

Material: High speed steel (HSS) cutters are the least-expensive and shortest-lived cutters. Cobalt steel is an improvement on HSS and generally can be run 10% faster. Carbide tools are more expensive than steel, but last longer, and can be run much faster, so prove more economical in the long run. HSS tools are perfectly adequate for many applications. The progression from HSS to cobalt steel to carbide could be viewed as very good, even better, and the best.

Diameter: Larger tools can remove material faster than small ones, therefore the largest possible cutter that will fit in the job is usually chosen. The radius of the cutter must be less than or equal to the radius of the smallest arc. The time required to produce a given quantity of parts includes the initial setup time and the cycle time for each part. The setup time is composed of the time to setup the turning machine, plan the tool movements (whether performed manually or by machine), and install the fixture device into the CNC Turning lathe machine.

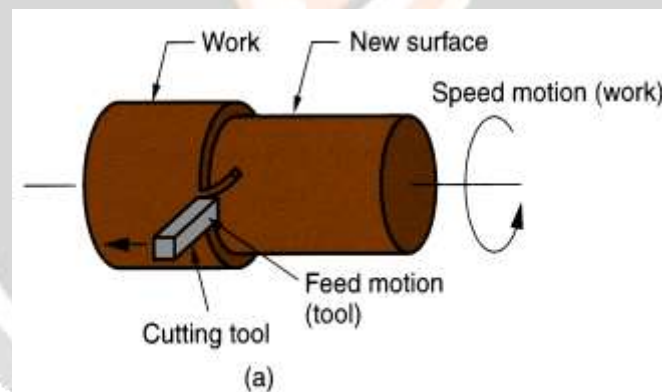


Figure -1: Turning Operation

2.1 Steps of Experiment


- Step 1: Centering the round bar
- Step 2: Turning the round bar
- Step 3: Removing the buds from the bar
- Step 4: Measurement of surface roughness

Table -1: Orthogonal Array


Sr. No.	Speed (rpm)	Feed (mm/rev)	Depth of Cut (mm)	Surface Roughness for D2	Surface Roughness for AISI 304
1	1500	0.13	1	1.525	0.785
2	1500	0.14	1.5	1.775	0.722
3	1500	0.15	0.5	3.028	1.089
4	1300	0.13	1	1.29	0.582
5	1300	0.14	1.5	1.895	0.876
6	1300	0.15	0.5	2.241	1.11
7	1200	0.13	1	1.64	0.577
8	1200	0.14	1.5	1.868	0.792
9	1200	0.15	0.5	2.288	0.897

3. Results Analysis

Below given graphs gives the result analysis of main effect plot of surface roughness on D2 Steel and AISI 304 Steel.

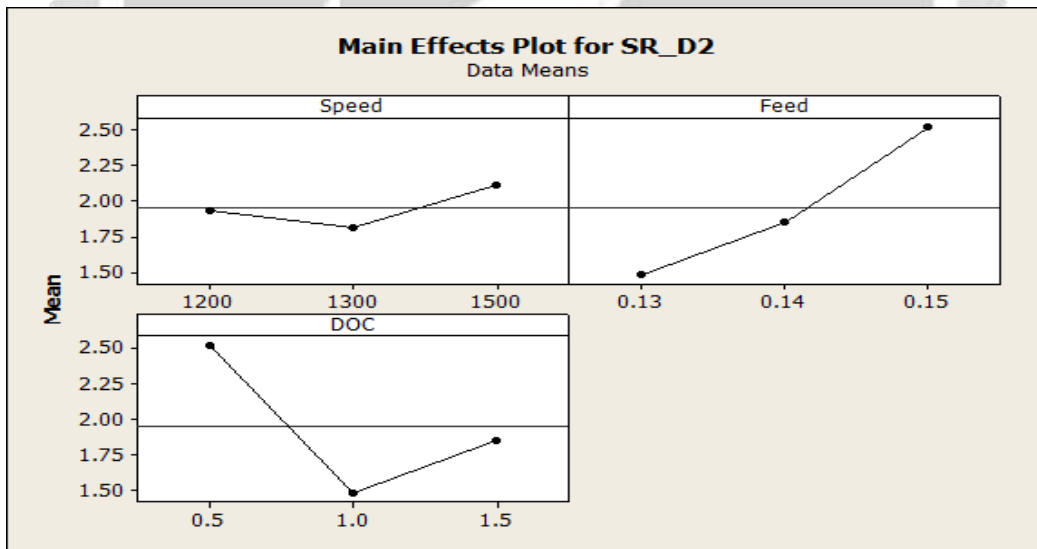

Graph -1: Main Effect Plot of Surface Roughness for D2 Steel

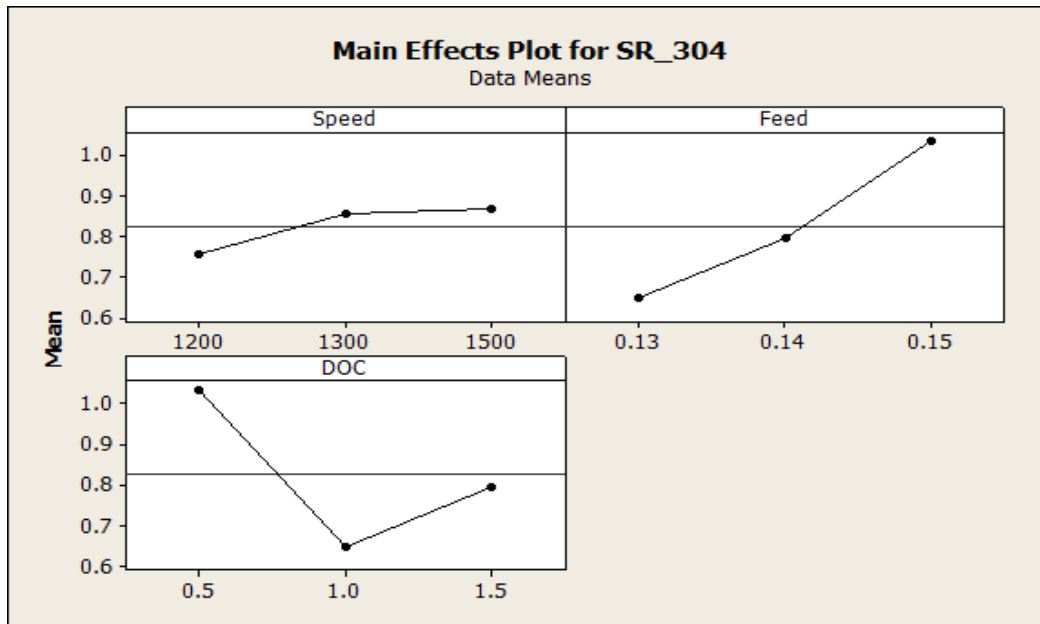

Graph -2: Main Effect Plot of Surface Roughness for AISI 304 Steel

4. CONCLUSIONS

- Thus in our project, we have performed a detailed experiment process of the cutting parameters influencing the surface roughness on a metal after CNC Turning.
- In our work process we have identified the values of the optimum cutting parameters to get the minimum Surface roughness
- We have experimented with various combinations of the three cutting parameters i.e. Spindle Speed, Depth of Cut and Feed Rate.
- We have arrived on a conclusion that the minimum surface roughness in D2 steel is obtained when the Spindle speed is 1300 rpm, Depth of cut is 1 mm and Feed Rate is 0.13 mm/rev.
- In case of AISI 304 Steel the minimum surface is obtained when the spindle speed is 1200 rpm, Depth of cut is 1mm and Feed Rate is 0.13 mm/rev.

5. REFERENCES

- [1]. P.N., Rao, Manufacturing Technology, Tata McGraw Hill publication, India, 2008.
- [2]. Sanjit moshat, Saurav data, Ashish bandopaddhayay, Pradip kumar Pal, Optimization of CNC milling process parameters using PCA based Taguchi Method, International Journal of Engineering Science and Technology, Vol. 2, No. 1, pp. 92 – 102, 2010.
- [3]. Sujit Kumar Jha, Optimization of Process Parameters for optimal MRR during Turning Steel bar using Taguchi Method and ANOVA, International Journal Mechanical Engineering and Robotics Research, Vol. 3, Issue 2, pp. 231 – 243, 2014.
- [4]. Reference Phadke, M.S., Quality Engineering Using Design of Experiment, Quality Control, Robust Design and The Taguchi Method, Wadsworth & Books, California, 1988.