

# Weight optimization of rotary face pallet using FEA software

Mr. Jape Pandurang B.<sup>1</sup>, Mr. Joshi Yogesh C.<sup>2</sup>, Mr. Jangam Ajay K.<sup>3</sup>,  
Mr. Rahane Avinash B.<sup>4</sup>, Prof. Karwande Amit H.<sup>5</sup>

<sup>1</sup>Students, Mechanical Engg. Department, SNDCOE&RC, Yeola, M.S., India.

<sup>2</sup>Students, Mechanical Engg. Department, SNDCOE&RC, Yeola, M.S., India.

<sup>3</sup>Students, Mechanical Engg. Department, SNDCOE&RC, Yeola, M.S., India.

<sup>4</sup>Students, Mechanical Engg. Department, SNDCOE&RC, Yeola, M.S., India.

<sup>5</sup>Asst. Professor, Mechanical Engg. Department, SNDCOE&RC, Yeola, M.S., India

## ABSTRACT

Rotary tables have fixed or adjustable indexing angles. The table stops for a specified period of time so that an operation can be performed at each station during every revolution. The supporting bearings of rotary tables determine both the load capacity and accuracy. Re circulating ball bearings are cheaper than Angular contact bearings. But angular contact bearings provide better load capacity and axial stiffness. Cross-roller bearings are also used. For a large sized table with high load capacity, the hydrostatic bearings are also used. Selection of rotary tables requires an analysis of specifications and features. Rotary Table is also called as rotary indexing table is used in machine tool as an aggregate for machining of components on multi faces. To find the exact shape of the rotary pallet which has optimum stress & deflection by removing the unwanted material to reduce the weight of rotary table. Analysis of a rotary table pallet will be done for a certain loading condition of an existing model and stresses as well as deflection will be determined for same model by using finite element analysis.

**Keyword** -ANSYS, FEA, Rotary Face Pallet.

## 1. INTRODUCTION

Rotary tables are mostly used for index parts in defined, angular increments. They can be machined, worked in multiple operations. It consists of a circular steel plate, spindles, a drive system, and pins that hold parts in proper place. Rotary tables have fixed or adjustable indexing angles. The table stops for a specified period of time so that an operation can be performed at each station during every revolution. The supporting bearings of rotary tables determine both the load capacity and accuracy. Re circulating ball bearings are cheaper than Angular contact bearings. But angular contact bearings provide better load capacity and axial stiffness. Cross-roller bearings are also used. For a large sized table with high load capacity, the hydrostatic bearings are also used. Selection of rotary tables requires an analysis of specifications and features. It contains maximum indexing increment, rotational speed, torque obtained at the table top, maximum axial load, maximum applicable machining force, maximum radial load, work table diameter. A variety of features are available. Some table surfaces can be raised or lowered at a controlled angle. Others have more than one rotating work surface. Computer numerically controlled (CNC) devices provide greater accuracy and repeatability. Position encoders are often used to relay the position of the table surface.

Rotary Table is also called as rotary indexing table is used in machine tool as an aggregate for machining of components on multi faces. A component can be clamped in fixture assembly mounted on round table can be milled, drilled, boring, tapping, etc operations can be perform. Rotary Table are available in market with different indexing positions like 180°, 90°, 1° and continuous rotation Incremental angle of 0.001°. Rotary axis is essential for machining the complex jobs where the machining forces are not at 90 or 180 degree to each other. Even if the jobs are rectangular, these can be machined in one setup using rotary table to improve the accuracy and productivity. Rotary table is designed with heavy duty axial radial roller bearing to take heavy loads. Rotary tables with dual lead worm and worm wheel with from correction are widely used for longer life and sustained accuracy.

An automatic movable table supports a work piece and slides or pivots inside and outside of the machining center. Multiple pallets allow an operator to set up a part while another is being machined. In the CNC machines, fixtures are still required to locate and hold the work pieces while machining. The work holding devices should have the following uniqueness:

- It must have required accuracy and must have matching reference surfaces with the reference system.
- It allowed performing a number of operations on different faces in a single setting.
- It must enable quick loading and unloading.
- It must be fool-proofing to avoid incorrect loading of the job.
- It must be sufficient rigidity to fully withstand the cutting forces.
- It must be safe in use and loading and unloading.
- It must have a sufficient of clamping force for use of full roughing cuts.
- It must be simple in construction maximum as possible.

Automatic pallet change over systems is used in modern CNC machines. These pallets simply move for interchanging their positions on the machine table. While machining is being done on a job kept on one pallet, the other pallets are accessible to the operator for clamping and unclamping raw material or finished product. This saves a lot of material handling and set up time, resulting in higher productivity.

The purpose of this work is to develop a Pallet to enhance the effectiveness of machining centers with multi-pallet automatic pallet changers. Rotary tables are provided with Pneumatic or Hydraulic Brake to support cutting forces. Some of the salient features of rotary tables comprises of the following:

- Hydraulic / Pneumatic clamping options.
- Dual lead worm and worm gear set for backlash elimination.
- Large module worm / worm wheel set for heavy duty application.
- Radial or axial roller bearings for high rigidity.

Rotary Table is also called as rotary indexing table is used in machine tool as an aggregate for machining of components on multi faces. A component can be clamped in fixture assembly mounted on round table can be milled, drilled, boring, tapping, etc operations can be perform. Rotary Table are available in market with different indexing positions like  $180^\circ$ ,  $90^\circ$ ,  $1^\circ$  and continuous rotation Incremental angle of  $0.001^\circ$ . All machine tool manufacturers mostly need to import those Rotary Tables as per their customer requirement is from "NIKKEN, FIBRO, GSM, GOLDENSUN, KITAGAWA" companies cost & delivery period is the main concern, though the product of good quality. Rotary Table is available in market from smaller size to very large size with various specifications as regards

- Table Diameter
- Indexing accuracy.
- Load carrying capacity.
- Max rotational speed.
- Horizontal & Vertical orientation.
- Hydraulic or Pneumatic clamping.
- Stand alone or pallet mounting precision.
- Suitable for vertical machining centre, Horizontal machining centre, Special purpose machines.

## 2. PROBLEM DEFINITION

To find the exact shape of the rotary pallet which has optimum stress & deflection by removing the unwanted material to reduce the weight of rotary table.

Analysis of a rotary table pallet will be done for a certain loading condition of an existing model and stresses as well as deflection will be determined for same model by using finite element analysis.

Comparison of the results will be done for the modified pallet obtain by trial and error method, to maintain the allowable stresses and deflection.

## 2.1 OBJECTIVE

- 1) Design of critical parts like Pallet considering machining force and weight of the work piece into the account.
- 2) Optimization of weight of the pallet for particular loading conditions and structural rigidity by analytical method.
- 3) Structural and Dynamic Analysis of pallet will done using finite element package
- 4) Validation of the theoretical optimization results with finite element results.

The Dynamic analysis is carried out to check the dynamic behaviour of the critical components like housing and pallet.

## 2.2 SCOPE

- Removing the unwanted material of the pallet.
- Reduce the weight of rotary table pallet.
- Easy to handle.
- Less machining work require by using steel plates for housing.
- Use of weldment body for housing there is no need of mould and pattern for manufacturing housing.
- Maintain the high machining accuracy.
- Reduce the manufacturing cost.

## 3. METHODOLOGY USED IN PROJECT WORK

The first step is to calculate the parameters by using the given specification. Based on the geometric dimension obtained cad model of the rotary pallet and casing is generated using an appropriate CAD modeling software like SOLIDEDGE, CATIA V5. The generated model is discretized using meshing software Ansys14.5. The discretized models are solved with appropriate boundary condition. The results are obtained are analyzed and required modification to geometric model is carried out and the process is repeated once rotary pallet geometry is optimized. Initially the pallet is designed for dimensions specified by the customer and it is easily suit the HMC machines for various operations but was not having any considerable deflection. The pallet of size 200 mm diameter is designed for deflection and stresses. The optimized weight of modified pallet is validated by analytical method as well as software. The analysis has been carried out on the existing Pallet by FEA to check the stresses and deflection. The process flow chart to carry out finite element analysis of the rotary pallet

## 4. DESIGN AND MODELLING OF ROTARY PALLET

Pallet is the most critical component in the rotary table assembly. Design of the pallet should take care of several aspects like work holding space, less deflection, fixture mounting facilities, T – slots for rigid fastening, specific load carrying capacity, and required elevation, less weight as shown in Figure 1

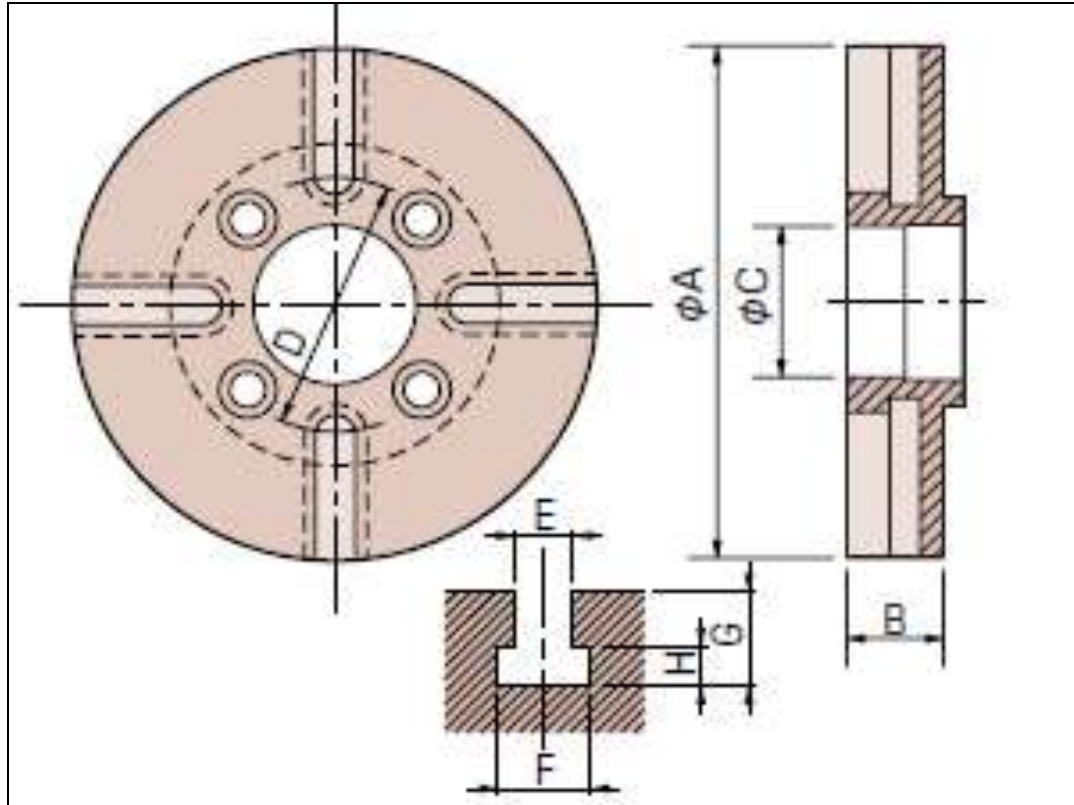


Fig.1 Details of Rotary Pallet (RNA-200)[2]

Table 1 Specification of Rotary table palate from standard catalog [7]

Unit : mm								
	A Pallet outer dia.	B	C	D	E	F	G	H
RNA-160	160	30	φ50H7	φ75	12H8	19 <sup>+2</sup> <sub>0</sub>	19	8 <sup>+1</sup> <sub>0</sub>
	200							
RNA-200	200	30	φ60H7	φ90	14H8	23 <sup>+2</sup> <sub>0</sub>	23	9 <sup>+1</sup> <sub>0</sub>
	250							
RNA-250	250	30	φ75H7	φ110				
RNA-320	320	40	φ110H7	φ140				



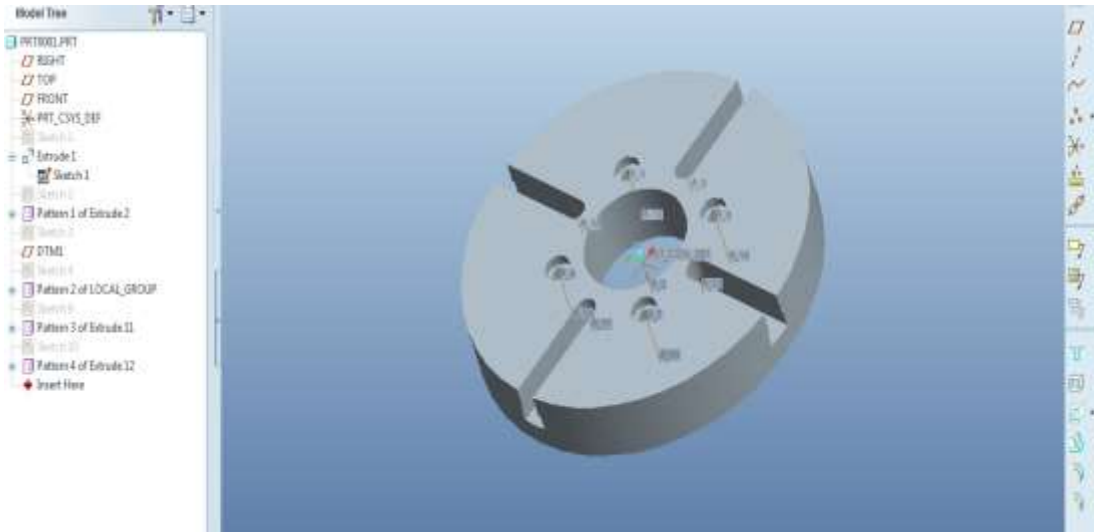


Fig.2 3D CAD model of Existing pallet using PRO-E software (RNA-200)

## 5. PLANNING FOR PROJECT STAGE II

### 5.1 FEA (Finite Element Analysis)

The finite element method is numerical technique, well suited to digital computers, which can be applied to solve problems in solid mechanics, fluid mechanics, heat transfer and vibrations. The procedures to solve problems in each of these fields are similar in all finite element models of the domain (the solid in solid mechanics problems) is divided into a finite number of elements. These elements are connected at points called nodes. In solid models, displacements in each element are directly related to the nodal displacements. The nodal displacements are then related to the strains and the stresses in the elements. The finite element method tries to choose the nodal displacements so that the stresses are in equilibrium (approximately) with the applied loads. The nodal displacements must also be consistent with any constraints on the motion of the structure.

The finite element method converts the conditions of equilibrium into a set of linear algebraic equations for the nodal displacements. Once the equations are solved, one can find the actual strains and stresses in all the elements. By breaking the structure into a larger number of smaller elements, the stresses become closer to achieving equilibrium with the applied loads. Therefore an important concept in the use of finite element methods is that, in general, a finite element model approaches the true solution to the problem.

#### Work to be done in Stage II:-

Following path is followed for the proceeding project work for project stage II

Table 2 Probable work in project stage II

Sr. No.	Month	Task to be done
1	November 2018	Review research paper proceeding and paper publication on project stage I
2	December 2018	Design calculation of different rotary face pallet.
3	January 2019	FEA analysis and simulation with the design calculation for optimization of weight of rotary face pallet.

4	February 2019	Final research paper proceeding and paper publication on project stage II
5	March 2019	Report writing with guidance from project guide
6	April 2019	Report writing with guidance from project guide and final presentation preparation.

## REFERENCES

- [1] Funaru, M[Arian]; Mihaila, L[Ucian]; Pascu, M[Arius] & Andrioaia, D[Ragos] “Rotary Index Table Used On Multi-Axis Machining Centers” Annals of DAAAM for 2012 & Proceedings of the 23rd International DAAAM Symposium, Volume 23,2012.
- [2] Mihaila, L[Ucian]; Funaru, M[Arian]; Obrea, C[Laudiu] F[Lorin] & Andrioaia, D[Ragos] “Automatic Pallet Changer Mechanism Used On Machining Centers” 23rd International Daaam Symposium, Volume 23, No.1, 2012.
- [3] Michael Wang, Suresh Sethi, Chelliah Sriskandarajah, Steef Van De Velde, “Minimizing Makespan In Flowshops with Pallet Requirements: Computational Complexity” Infor vol. 35, no. 4, Nov. 1997.
- [4] Lubomír Novotny, JiriMarek “Numerical and Analytical Modelling Of A Pallet Used At A Machining Centre At High Speed Numerical and analytical modelling”; June 2008, 12/13.
- [5] Marian Funaru, Gheorghe Stan, Lucian Mihaila, Marius Pascu,Dragos Andrioaia “Precise Rotary Table Indexing System Used On Milling Machining Centres” Journal Of Engineering Studies And Research – Volume 19 , Issue No. 1, 2013.
- [6] S. Pellegrinelli , T.Tolio,“Pallet operation sequencing based on network part program logic”, Robotics and Computer-Integrated Manufacturing, Vol. 29, 2013, pp. 322–345.
- [7] [www.fibro.com](http://www.fibro.com)
- [8] [www.freefullpdf.com](http://www.freefullpdf.com)
- [9] [www.wikipedia.com](http://www.wikipedia.com)

## BIOGRAPHIES (Not Essential)

	Mr. Jahav Ajay Balasaheb, student of the SND Collage of Engineering & Research Center Yeola, Nashik-423401, Maharashtra, India.in the year 2018-19. In the mechanical Engineering. Work on the project “Helical spring parameter optimization using FEA and Analytical results.
	Mr. Pawar Tushar Rajendra, student of the SND Collage of Engineering & Research Center Yeola, Nashik-423401, Maharashtra, India.in the year 2018-19. In the mechanical Engineering. Work on the project “Helical spring parameter optimization using FEA and Analytical results.
	Mr. Salunke Chandrakant Maruti, student of the SND Collage of Engineering & Research Center Yeola, Nashik-423401, Maharashtra, India.in the year 2018-19. In the mechanical Engineering. Work on the project “Helical spring parameter optimization using FEA and Analytical results.
	Mr. Sawant Amol Sanjay, student of the SND Collage of Engineering & Research Center Yeola, Nashik-423401, Maharashtra, India.in the year 2018-19. In the mechanical Engineering. Work on the project “Helical spring parameter optimization using FEA and Analytical results.
	Prof. Karwande A.H.,Assistant Professor in mechanical engineering department at SND College of Engineering & Research Center Yeola, Nashik-423401,